



# Hybrid Leak Localization Using Acoustic Sensors via Intercorrelation Method and MUSIC Algorithm

Ghassan Alnwaimi<sup>1\*</sup>, Hatem Boujemaa<sup>2</sup>, Feras Alfosail<sup>3</sup>, Nebras Sobahi<sup>1</sup>

<sup>1</sup> Department of Electrical and Computer Engineering, King Abdulaziz University, Jeddah 21589, SAUDI ARABIA.

<sup>2</sup> Sup'Com, COSIM Laboratory, University of Carthage, TUNISIA.

<sup>3</sup> Consulting Services Department, Saudi Aramco, Dhahran 31311, SAUDI ARABIA.

\*Corresponding Author (Email: [galnwaimi@kau.edu.sa](mailto:galnwaimi@kau.edu.sa)).

Paper ID: 12A11F

Volume 12 Issue 11

Received 29 March 2021

Received in revised form 04

August 2021

Accepted 12 August 2021

Available online 19 August

2021

## Keywords:

Hybrid leak localization;

Gas pipeline; Acoustic

Sensors; MUSIC

algorithm;

Intercorrelation method;

Monte-Carlo simulation;

Leak detection.

## Abstract

In this paper, we propose to combine the intercorrelation method and the Multiple Signal Classification algorithm (MUSIC) to locate a leak on a gas pipeline using acoustic sensors. We compare the Root Mean Square Error (RMSE) of the leak position estimate using hybrid localization based on a combination of MUSIC and intercorrelation method to the MUSIC algorithm and the intercorrelation method using two acoustic sensors and a pipeline of length 100m. At average Signal to Noise Ratio equal to 0 dB, the RMSE of the leak position estimate is equal to 0.88 m for the hybrid algorithm while it is 1.6 m for the MUSIC algorithm and 7.4 m for the intercorrelation method. The intercorrelation method, the hybrid, and the MUSIC algorithms are unbiased as the RMSE converges to zero at high SNR.

**Disciplinary:** Electrical and Computer Engineering & System.

©2021 INT TRANS J ENG MANAG SCI TECH.

## Cite This Article:

Alnwaimi, G., Boujemaa, H., Alfosail, F., Sobahi, N. (2021). Hybrid Leak Localization Using Acoustic Sensors via Intercorrelation Method and MUSIC Algorithm. *International Transaction Journal of Engineering, Management, & Applied Sciences & Technologies*, 12(11), 12A11F, 1-14. <http://TUENGR.COM/V12/12A11F.pdf> DOI: 10.14456/ITJEMAST.2021.216

## 1 Introduction

Leak localization on gas pipelines is a very important process allowing to avoid accidents such as expositions and harmful pollution [1-4].

Any gas leak can result in a considerable gas loss. The identification and localization of leaks on gas pipelines allow for rapid pipeline repair [5-6]. Ultrasonic Testing (UT) is a method of determining the thickness of a gas pipeline and detecting any corrosion-related changes.

Acoustic sensors can also be used to detect and identify a gas tank leak. An acoustic signal is produced by the departing gas. The acoustic signal is received at sensors S1 and S2 with different

propagation delays  $t_1$  and  $t_2$ . An inter-correlation between the two sensed signals at  $S_2$  and  $S_1$ ,  $x_2(t)$  and  $x_1(t)$ , has a maximum at  $t_0=t_2-t_1$ . Let  $c$  the speed of the acoustic signal and  $d$  be the distance between the two sensors  $S_1$  and  $S_2$ . We have  $d=(t_1+t_2)*c$ . We deduce  $t_2=d/(2c)+t_0/2$ . The distance between sensor  $S_2$  and the leak position is computed using  $d_2=c *t_2=d/2+t_0c/2$ .

Magnetic sensors can be mounted inside the pipeline, and any leaks will produce a change in the magnetic field, which can be detected quickly. Magnetic sensors, on the other hand, can only detect the leak and not find it. The gas pipeline's pressures and flow rates (Kg/s) can be used to detect and pinpoint a leak. This strategy, however, necessitates a robust observation model [7-14].


A change in mass balance can also be used to detect a leak without any prior knowledge of its location. Magnetic induction sensors can also be used to detect subsurface pipeline leaks [17]. To detect any leak on gas pipelines, ground-penetrating radar (GPR) was proposed in [23-26]. Gas concentration sensors, for example, can be used to detect and locate a leak using the Maximum Likelihood algorithm (ML).

The main contributions of this paper are


- We propose the use of the MUSIC algorithm to locate a leak on a gas pipeline using acoustic sensors. The use of the MUSIC algorithm based on signals of acoustic sensors for leak localization has not been yet proposed in [1-26].
- We suggest combining the MUSIC algorithm and the intercorrelation method to minimize the Mean Square Error (MSE) of the leak location estimate.
- We compare the performance of the hybrid algorithm to MUSIC and the intercorrelation method. At average SNR equal to 0 dB, the RMSE of the leak position estimate is equal to 0.88 m for the hybrid algorithm while it is 1.6 m for the MUSIC algorithm and 7.4 m for the intercorrelation method. The hybrid and MUSIC algorithms as well as the intercorrelation method are unbiased as the RMSE converges to zero at high SNR.
- It is shown that the MSE of hybrid leak localization using two estimators is half of the harmonic mean of MSE of the two estimators. The MSE of the hybrid estimator is lower than the minimum of MSE of the MUSIC algorithm and the intercorrelation method.

## 2 Inter-correlation Method


As shown in Figure 1, acoustic sensors allow also detection and locate a leak in a gas tank. The escaping gas generates an acoustic signal. The acoustic signal is received at sensors  $S_1$  and  $S_2$  with different delays  $t_1$  and  $t_2$ . An inter-correlation between the two sensed signal<sub>n</sub> at  $S_2$  and  $S_1$ ,  $x_2(t)$  and  $x_1(t)$ , has a maximum in  $t_0=t_2-t_1$ . Let  $c$  the speed of the acoustic signal and  $d$  be the distance between the two sensors  $s_1$  and  $s_2$ . We have  $d=(t_1+t_2)*c$ . Therefore,  $t_2=d/(2c)+t_0/2$ . The distance between sensor  $S_2$  and the leak position is computed using  $d_2=c *t_2=d/2+t_0c/2$ . An intercorrelation between the sensed signals is shown in Figures 2 and 3 for SNR equal to 10 and 0 dB. In Figures 2 and 3,  $T_s$  is the sample period.

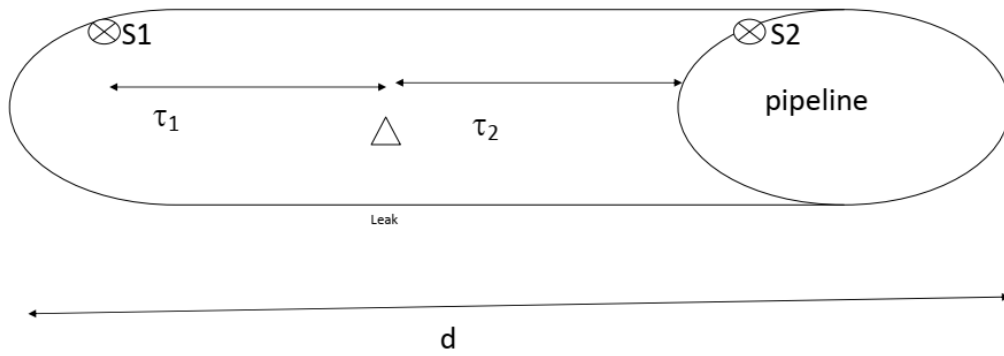

**Figure 1:** Leak localization using Acoustic sensors.

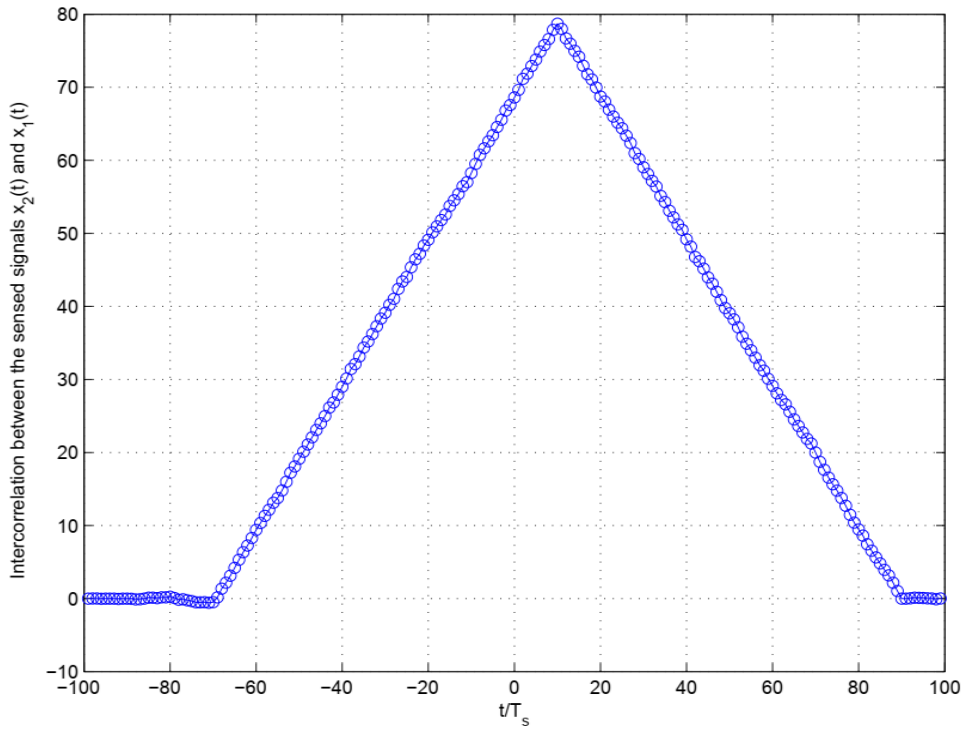

**Figure 2:** Intercorrelation between the sensed signals at sensors S2 and S1 at SNR=10dB.

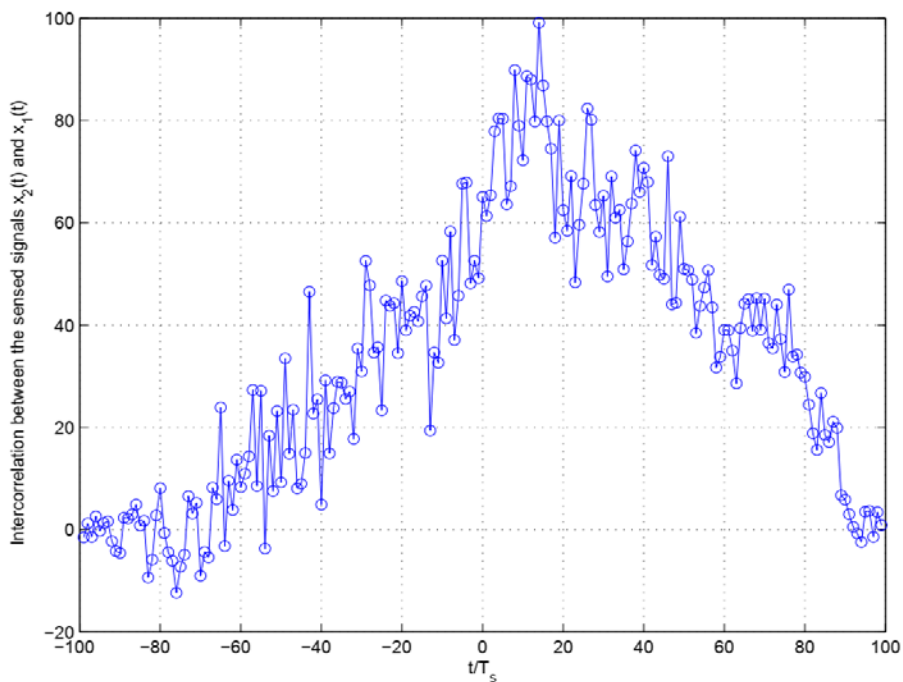

**Figure 3:** Intercorrelation between the sensed signals at sensors S2 and S1 at SNR=0dB.

### 3 Leak Localization Using Acoustic Sensors and MUSIC Algorithm

The received signal at time  $t$ , at  $q$ -th sensor over the  $m$ -th time slot can be written as

$$x_q^{(m)}(t) = s(t - \tau_q) + n_q^{(m)}(t) \quad (1),$$

where  $s(t)$  is the acoustic emitted by the leak,  $\tau_q$  is the time delay between the leak and  $q$ -th acoustic sensor and  $n_q^{(m)}(t)$  is an additive Gaussian noise with variance  $\sigma^2$ .

The samples of the received signal over the  $m$ -th time slot are written as

$$X_q^{(m)} = [x_q^{(m)}(T_0), x_q^{(m)}(T_0 - T_s), \dots, x_q^{(m)}(T_0 - (N - 1)T_s)]^T + N_q^{(m)} \quad (2),$$

where  $T_0$  is a sample time and  $T_s$  is the sample period,  $N$  is the number of samples and

$$N_q^{(m)} = [n_q^{(m)}(T_0), n_q^{(m)}(T_0 - T_s), \dots, n_q^{(m)}(T_0 - (N - 1)T_s)]^T \quad (3).$$

The received signal can also be written as

$$X_q^{(m)} = S(\tau_q) + N_q^{(m)} \quad (4),$$

where

$$S(\tau) = [s(T_0 - \tau), s(T_0 - \tau - T_s), \dots, s(T_0 - (N - 1)T_s - \tau)]^T \quad (5).$$

Using the signals of  $L$  time slots, an estimation of the time correlation matrix  $R_q$  at the  $q$ -th sensors can be computed as

$$R_q = \frac{\sum_{m=1}^L X_q^{(m)} (X_q^{(m)})^T}{L} \quad (6),$$

Matrix  $R_q$  can be decomposed as follows

$$R_q = V_s \Delta_s V_s^T + V_n \Delta_n V_n^T \quad (7),$$

where the columns of  $V_s$  are the eigenvectors that span the signal subspace while the column vectors of  $V_n$  span the noise subspace of dimension equal to one.  $\Delta_s$  and  $\Delta_n$  are diagonal matrices containing the eigenvalues of signal and noise subspaces.

An estimation of the time delay  $\tau_q$  between the leak and  $q$ -th acoustic sensor can be obtained by maximizing the following metric

$$\hat{\tau}_q = \operatorname{argmax}_{\tau} \frac{1}{S(\tau)^T V_n V_n^T S(\tau)} \quad (8),$$

A single sensor is sufficient to estimate the leak position. When two or many sensors are available, we can make an average of the obtained estimates.

### 4 Hybrid Localization of Leak

Let  $\hat{x}_{0,1}$  be the leak position estimate using acoustic sensors and the intercorrelation method. Let  $\hat{x}_{0,2}$  be the leak position estimate using acoustic sensors and the MUSIC algorithm. We suggest

combining these two estimates of leak position to minimize the Mean Square Error (MSE). The hybrid estimator is written as

$$\hat{x}_{h,2} = \alpha \hat{x}_{0,1} + (1 - \alpha) \hat{x}_{0,2} \quad (9),$$

where  $0 < \alpha < 1$  is a weighting coefficient.

The MSE of the hybrid estimator is given by

$$MSE_2 = E \left[ (x_0 - \hat{x}_{h,2})^2 \right] = \alpha^2 \sigma_1^2 + (1 - \alpha)^2 \sigma_2^2 \quad (10),$$

where  $E(\cdot)$  is the expectation operator,  $x_0$  is the leak position and  $\sigma_i^2$  is the MSE of i-th estimator evaluated as

$$\sigma_i^2 = E \left[ (x_0 - \hat{x}_{0,i})^2 \right] \quad (11).$$

To minimize the MSE2 of the hybrid estimator, we should have

$$\frac{\partial MSE_2}{\partial \alpha} = 0 \quad (12).$$

Using the last equation, we obtain

$$\alpha = \frac{\sigma_2^2}{\sigma_2^2 + \sigma_1^2} \quad (13).$$

Using Equations (10) and (13), we obtain the expression of the minimum MSE by combining two estimators as


$$MSE_2 = \frac{\sigma_2^2 \sigma_1^2}{\sigma_2^2 + \sigma_1^2} = \frac{1}{\frac{1}{\sigma_1^2} + \frac{1}{\sigma_2^2}} < \min(\sigma_1^2, \sigma_2^2) \quad (14).$$

The MSE of hybrid leak localization using two estimators is half of the harmonic mean of MSE of the two estimators. The MSE of the hybrid estimator is lower than the minimum of MSE of the MUSIC algorithm and the intercorrelation method.


## 5 Numerical Results

We did 10000 Monte-Carlo simulations using two acoustic sensors for both the hybrid and MUSIC algorithms and the intercorrelation method using  $L=10$  time slots. The length of the pipeline is  $d=100\text{m}$  with a random location of the leak. Figure 4 shows that the RMSE of leak position estimate the intercorrelation method of section 2 is about 7.4 m at average SNR equal to 0 dB. At high average SNR, the RMSE converges to zero confirming that the intercorrelation method is unbiased.

Figure 5 compares the RMSE of the leak position estimate using the MUSIC algorithm of section 3 and the intercorrelation method of section 2. The MUSIC algorithm offers better performance than the intercorrelation method since the RMS is about 1.6 m at SNR equal to 0 dB while the RMS is 7.4 m for the intercorrelation method. The MUSIC algorithm is also unbiased as the RMSE converges to zero at high SNR.

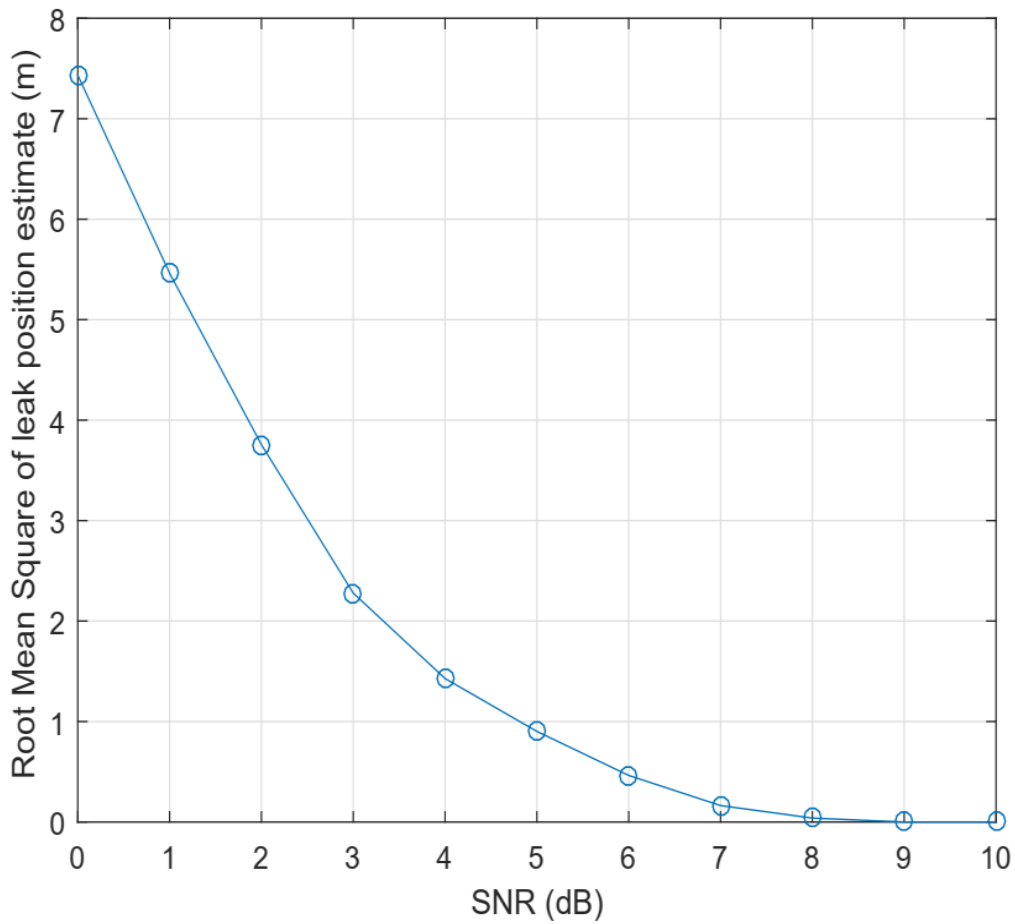


**Figure 4:** RMSE of leak position estimate using the inter-correlation method.

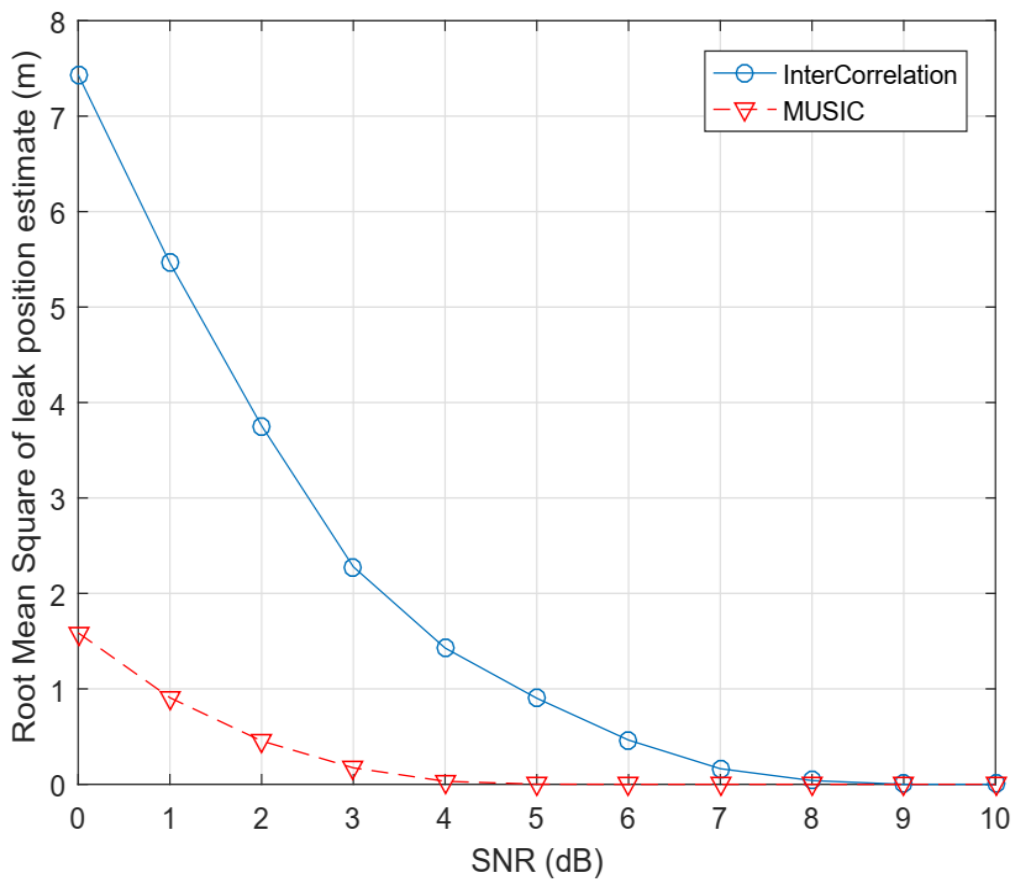


**Figure 5:** RMSE of leak position estimate using the inter-correlation method and MUSIC algorithm.

Figure 6 shows the MUSIC spectrum (8) with respect to the distance between the sensor and the leak  $d=\tau c$ . The MUSIC spectrum is maximum at the distance of 60m which is the real location of the leak. Therefore, the MUSIC allows precise estimation of the leak position.

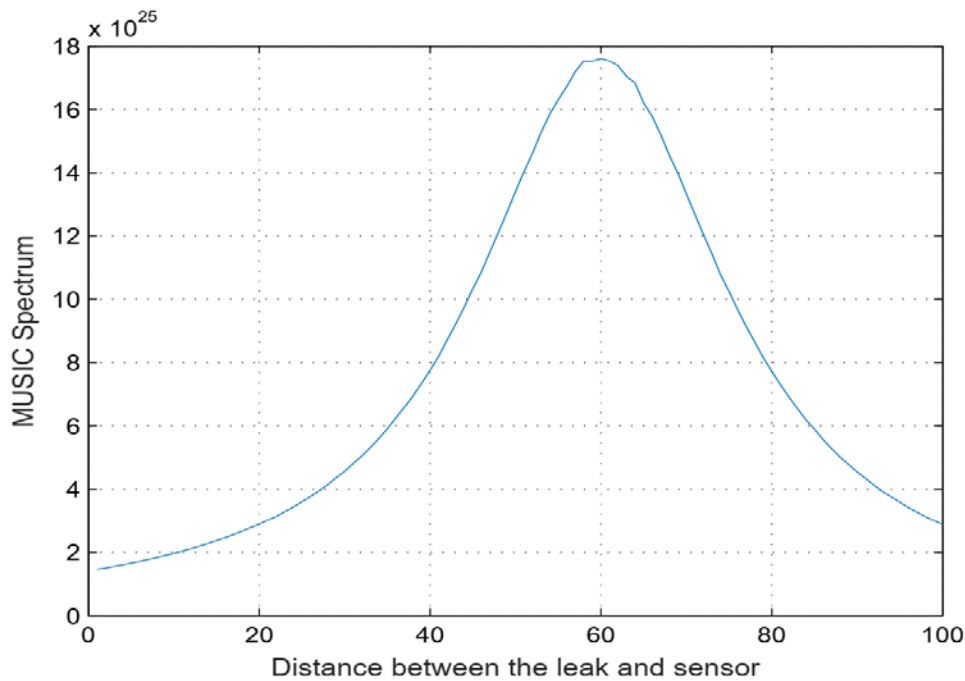

**Figure 6:** MUSIC algorithm for a leak at 60m from the sensor.

Figure 7 shows the RMSE using hybrid leak localization with the MUSIC algorithm and the intercorrelation method. The proposed hybrid localization technique offers a lower RMSE than the MUSIC algorithm and intercorrelation method. At SNR equal to 0 dB, the RMSE of hybrid localization is 0.88m while it is 1.6 m for the MUSIC algorithm and 7.4 m for the intercorrelation method.

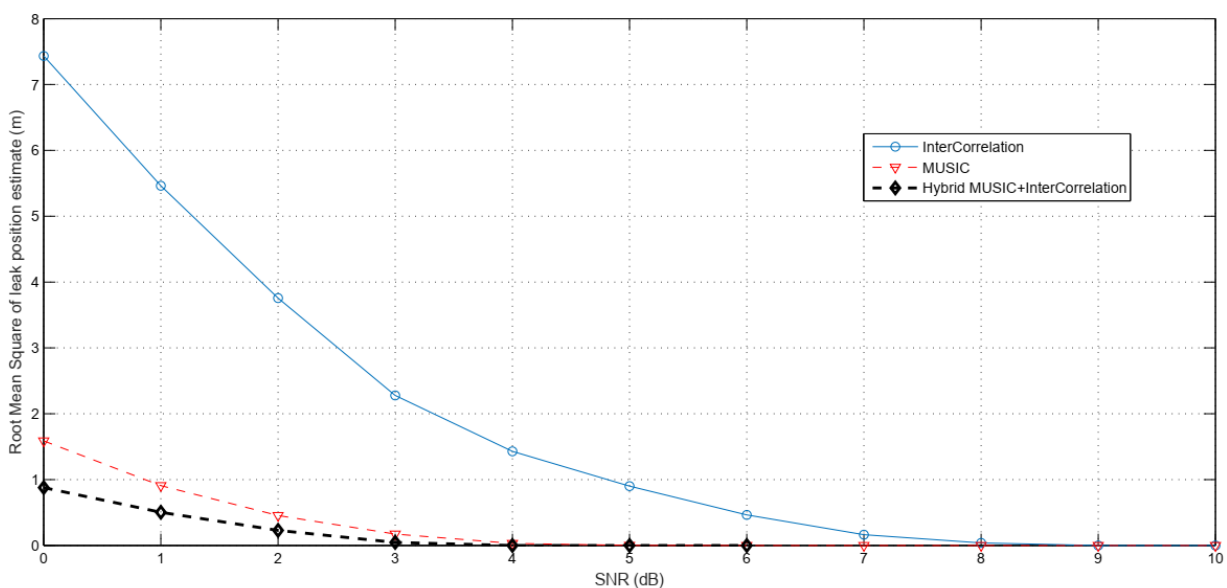

**Figure 7:** Hybrid localization using MUSIC algorithm and intercorrelation method.

## 6 Conclusion

In this paper, we combined the intercorrelation method and the MUSIC algorithm to locate a leak on a gas pipeline using acoustic sensors. We compared the RMSE of the leak position estimate using hybrid localization based on a combination of MUSIC and intercorrelation method to the MUSIC algorithm and the intercorrelation method using two acoustic sensors and a pipeline of length 100m. At average SNR equal to 0 dB, the RMSE of the leak position estimate is equal to 0.88 m for the hybrid algorithm while it is 1.6 m for the MUSIC algorithm and 7.4 m for the intercorrelation method. The intercorrelation method, the hybrid, and the MUSIC algorithms are unbiased as the RMSE converges to zero at high SNR. We have shown that the MSE of hybrid leak localization using two estimators is half of the harmonic mean of MSE of the two estimators. The MSE of the hybrid estimator is lower than the minimum of MSE of the MUSIC algorithm and the intercorrelation method.

As a perspective, we can work on leak localization on oil pipeline or using wireless sensors that harvests energy from radio frequency signals, wind, or solar energy.

## 7 Availability of Data and Material

Data can be made available by contacting the corresponding author.

## 8 Acknowledgement

This research work was funded by institutional Fund projects under grant no (IFPRC-068-135-2020). Therefore, the authors gratefully acknowledge technical and financial support from the Ministry of Education and King Abdulaziz University, Jeddah, Saudi Arabia.

The authors extend their appreciation to the Deputyship for Research & Innovation, Ministry of Education in Saudi Arabia for funding this research work through the project number IFPRC-068-135-2020” and King Abdulaziz University, DSR, Jeddah, Saudi Arabia.

## 9 References

- [1] Shuaiyong Li; Yumei Wen; Ping Li; Jin Yang; Lili Yang, "Leak detection and location for gas pipelines using acoustic emission sensors", IEEE International Ultrasonics Symposium, Pages: 957-960, 2012.
- [2] K. S. Ong; W. H. Png; H. S. Lin; C. H. Pua; F. A. Rahman, " Acoustic vibration sensor based on macro-bend coated fiber for pipeline leakage detection", 2017 17th International Conference on Control, Automation and Systems (ICCAS), Pages: 167-171, 2017.
- [3] Pugalenthil Karkulali; Himanshu Mishra; Abhisek Ukil; Justin Dauwels, "Leak detection in gas distribution pipelines using acoustic impact monitoring", IECON 2016 - 42nd Annual Conference of the IEEE Industrial Electronics Society, Pages: 412-416, 2016.
- [4] Shuaiyong Li; Yumei Wen; Ping Li; Jin Yang; Jing Wen, "Modal analysis of leakage-induced acoustic vibrations in different directions for leak detection and location in fluid-filled pipelines", 2014 IEEE International Ultrasonics Symposium, Pages: 1412-1415, 2014.
- [5] King Ma; Henry Leung; Ehsan Jalilian; Daniel Huang, "Fiber-Optic Acoustic-Based Disturbance Prediction in Pipelines Using Deep Learning", IEEE Sensors Letters, Volume: 1, Issue: 6, 2017.
- [6] Khawar Rehman; Faiza Nawaz, "Remote pipeline monitoring using Wireless Sensor Networks",



International Conference on Communication, Computing and Digital Systems (C-CODE), Pages: 32-37, 2017.

- [7] A. Benkherouf; A. Y. Allidina, "Leak detection and location in gas pipelines", IEE Proceedings D - Control Theory and Applications, Volume: 135, Issue: 2, Pages: 142 - 148, 1988.
- [8] Chun Hua Tian; Jun Chi Yan; Jin Huang; Yu Wang; Dong-Sup Kim; Tongnyoul Yi, "Negative pressure wave based pipeline Leak Detection: Challenges and algorithms", Proceedings of IEEE International Conference on Service Operations and Logistics, and Informatics, Pages: 372-376, 2012.
- [9] R. Sugunakar Reddy; Gupta Payal; Pugalenthi Karkulali; Mishra Himanshu; Abhisek Ukil; Justin Dauwels, "Pressure and flow variation in gas distribution pipeline for leak detection", IEEE International Conference on Industrial Technology (ICIT), Pages: 679-683, 2016.
- [10] Xinghua Liu; Sijing Liu; Yingying Su; Xianyong Deng, "Research on the method based on wavelet analysis of negative pressure for detection of gas pipeline leaking", IEEE International Conference of Online Analysis and Computing Science (ICOACS), Pages: 347-352, 2016.
- [11] Weiguo Lin; Xin Zhang, "A Novel Approach for Dynamic Pressure Transducer Based Pipeline Leak Detection", 6th World Congress on Intelligent Control and Automation, Volume: 2, Pages: 5299 - 5303, 2006.
- [12] Shili Chen; Pengcheng Li; Likun Wang, "Development on Dynamic Pressure sensor for long pipeline leak detection", 7th World Congress on Intelligent Control and Automation, Pages: 9168-9171, 2008.
- [13] Sugunakar Reddy Ravula; Srivathsan Chakaravarthi Narasimman; Libo Wang; Abhisek Ukil, "Experimental Validation of Leak and Water-Ingression Detection in Low-Pressure Gas Pipeline Using Pressure and Flow Measurements", IEEE Sensors Journal, Volume: 17, Issue: 20, Pages: 6734-6742, 2017.
- [14] Jiqiang Wang; Lin Zhao; Tongyu Liu; Zhen Li; Tong Sun; Kenneth T. V. Grattan, "Novel Negative Pressure Wave-Based Pipeline Leak Detection System Using Fiber Bragg Grating-Based Pressure Sensors ", Journal of Lightwave Technology, Volume: 35, Issue: 16, Pages: 3366-3373, 2017.
- [15] C.P. Liou, "Pipeline leak detection based on mass balance, "in Proceedings of the International Conference, ASCE, Seattle, USA, 1993.
- [16] J.C. Martins, P. Seleglim Jr, "Assessment of the performance of acoustic and mass balance methods for leak detection in pipelines for transporting liquids," Journal of Fluids Engineering, January 2010.
- [17] Zhi Sun, Pu Wang, Mehmet C. Vuran, Mznah A. Al-Rodhaan, Abdullah M. Al-Dhelaan, Ian F. Akyildiz, "MISE-PIPE: Magnetic induction-based wireless sensor networks for underground pipeline monitoring", Ad Hoc Networks, Vol.9, pages 218-227, 2011.
- [18] Xin Tan; Zhi Sun; Pu Wang, "On localization for magnetic induction-based wireless sensor networks in pipeline environments", IEEE International Conference on Communications (ICC), Pages: 2780-2785, 2015.
- [19] Yang Lijian; Liu Gang; Zhang Guoguang; Gao Songwei, "Sensor development and application on the oil-gas pipeline magnetic flux leakage detection", 9th International Conference on Electronic Measurement & Instruments, Pages: 2-876 - 2-878, 2009.
- [20] Jungmin Kim; Myoungki Choi; Jinyi Lee, " Employing magnetic sensor array for inspecting cracks in a pipeline", IEEE Sensors Applications Symposium, Pages: 273-276, 2011.
- [21] Dong Jin Seo; Tae Gyun Kim; Sung Woo Noh, "Underground pipeline tracking robot development based on magnetic inductive sensor", 2016 16th International Conference on Control, Automation and

Systems (ICCAS), Pages: 338-340, 2016.

- [22] Mustafa Alper Akkas; Radosveta Sokullu; Abdullah Balci, "Wireless sensor networks in oil pipeline systems using electromagnetic waves", 9th International Conference on Electrical and Electronics Engineering (ELECO), Pages: 143-147, 2015.
- [23] D. Moodie, L. Costello, D. McStay, "Optoelectronic leak detection system for monitoring subsea structures, Proceedings of the SPIE, Vol. 7726, Brussels, Belgium, 2010
- [24] F.L. Graf, "Using ground-penetrating radar to pinpoint pipeline leaks", Materials Performance 29 (4) (1990) 27–29.
- [25] G.W. Hennigar, "Leak detection: new technology that works", Gas Industries 37 (January), 16–18, 1993.
- [26] M. Bimpas, A. Amditis, N. Uzunoglu, "Detection of water leaks in supply pipes using continuous wave sensor operating at 2.45 GHz," Journal of Applied Geophysics 70, 226–236, 2010.
- 



**Dr. Ghassan Alnwaimi** is an Assistant Professor with the Department of Electrical and Computer Engineering, King Abdulaziz University. He received a B.Sc. degree (first honor) in Electronics and Communication Engineering from King Abdulaziz University, Jeddah, Saudi Arabia, an M.Sc. degree (with distinction) in Mobile and Satellite Communications from the University of Surrey, Guildford, U.K., and a Ph.D. degree from the Institute for Communication Systems (formerly Centre for Communication Systems Research), University of Surrey. His research interests encompass the Design of Cognitive Radio Systems, Self-organization Networks, Spectrum Sensing, Spectrum Management, Dynamic Spectrum Access Techniques, and Interference Management in Femtocells and Heterogeneous Networks.



**Professor Dr. Hatem Boujema** joined SUPCOM where he is a Professor. He received an Engineer's Diploma from "Ecole Polytechnique de Tunis, an MSC in Digital Communications from 'Telecom Paris Tech', a Ph. D. degree in Electronics and Communications from the same university. His research activities are in the field of Digital Communications, DS-CDMA, OFDM and MC-CDMA systems, HARQ protocols, Cooperative Communications, Cognitive Radio Networks, Scheduling, Synchronization, Network planning, Information Theory, Equalization and Antenna Processing.



**Dr. Feras K. Alfosail** is an Offshore Pipeline Engineer in Consulting Services Department at Saudi Aramco. He earned a PhD from King Abdullah University of Science and Technology (KAUST) in Mechanical Engineering. His work and research encompass the Design, Operation and Maintenance of Submarine Pipelines and Offshore Facilities. Feras is a Certified Professional Engineer by the Saudi Council of Engineers (SCE), Corrosion Technologist by NACE.



**Dr. Nebras Sobahi** an Assistant Professor with the Department of Electrical and Computer Engineering, King Abdulaziz University, Saudi Arabia. He received the B.Sc. and M.Sc. degrees in Electrical Engineering from King Abdulaziz University, and the second M.Sc. and Ph.D. degrees in Electrical Engineering from Texas A&M University, USA. His research interests include Nano/microfabrication, MEMS, Microfluidics, BioMEMS, and Signal and Image Processing.

---