



Analysis of Space Syntax Theory in Studio Bell in Canada

Pheik Yee Ang¹, Ahmad Sanusi Hassan¹, Yasser Arab^{*2}, Fatemeh Khozaei², Boonsap Witchayangkoon³

¹ School of Housing, Building and Planning, Universiti Sains Malaysia, MALAYSIA

² Department of Architectural Engineering, College of Engineering, Dhofar University, OMAN

³ Department of Civil Engineering, Thammasat School of Engineering, Thammasat University, THAILAND

*Corresponding Authors (Tel: +968 9987 2907, Email: yarab@du.edu.om).

Paper ID: 14A11

Volume 14 Issue 1

Received 06 September 2022

Received in revised form 06 December 2022

Accepted 13 December 2022

Available online 20 December 2022

Keywords:

Cultural Art; Justified graph; Visitor's circulation; Access analysis; Measurable scale

Abstract

Music and dance center intends to showcase world-class exhibitions and performances using advanced musical technology and innovation to people. This study reviews the space syntax of Studio Bell in Canada, emphasizing the permeability level and wayfinding to study the spatial configurations in depth. This research also studies the spatial connections established between public spaces and administration areas. The overall space syntax findings are analyzed using the alphanumeric system, the Likert Scale, and the justified graph. The findings are interpreted and tabulated in the table for a clearer understanding. The result shows that approximately 51.9 % of the building spaces are semi-private and average in wayfinding due to the limited access for paid visitors to the exhibitions and performance halls. The multiple-way route connects the visitors from a central node space to the branching space, leading visitors to experience a series of exhibitions and performances. The study concludes that public and private spaces are differentiated through the level of permeability and wayfinding. The design can be enhanced by appropriately allocating directional signage to the users. Overall, the building is a satisfactory design with well-zoned.

Discipline: Space Syntax, Spatial Configuration, Architecture

©2023 INT TRANS J ENG MANAG SCI TECH.

Cite This Article:

Ang, P.Y., Hassan, A.S., Arab, Y., Khozaei, F., and Witchayangkoon, B. (2023). Analysis of Space Syntax Theory in Studio Bell in Canada. *International Transaction Journal of Engineering, Management, & Applied Sciences & Technologies*, 14(1), 14A11, 1-15. <http://TUENGR.COM/V14/14A11.pdf> DOI: 10.14456/ITJEMAST.2023.9

1 Introduction

In the architecture industry, the technique of analyzing space syntax has been used widely to analyze the spatial cognition aspects of the place such as wayfinding and place-learning (Beck and Turkienicz, 2009). This research paper studies the typology of music and dance center in depth. The

public and spatial configuration of the music center is important to distinguish clear zoning between the visitors (public) and the administration and performers (private). development (Yusoff et al., 2019) Well-planned planning in the center helps achieve the goal of efficiency and equity. (Wolf, J.H., et al, 2021)

The music and dance center typically houses a series of exhibitions and galleries that are well-designed for the public. Similar to the performing art center, the music center usually houses performance halls that are intended for cultural and performing events. (Li, J.M. et al, 2019) The events include musical events, dance events, and sometimes theatre.

Dedicated to the Canadian Music, National Music Centre (NMC) in Canada, Studio Bell is a new cultural institution. The building itself indicates the renaissance of the district, attracting various types of audiences, at both national and international levels to the city. (Studio Bell, n.d) Studio Bell house a series of spaces that are similar to an interactive music education center. The spaces that can be found in the center include an education center, performance halls, a musical museum, recording studios, and a broadcasting center. (National Music of Canada, n.d)

Studio Bell is selected as the case study for this research as the building is interesting in terms of its spatial layout, appearance, and its background. The building space within the entire building is well connected, interconnecting the users from one space to another. Besides. Studio Bell is an award-winning project which obtained a proud achievement by winning the Award of Merit for Azure Magazine AZ in the year 2013. While in the subsequent year, the team won the Progressive Architecture Award. Many more awards were won by the team in the subsequent years. Besides, several publications feature the architecture of Studio Bell. (National Music of Canada, n.d).

This paper attempts to study the level of permeability and wayfinding based on the types of users in the Studio Bell through the spatial configurations within the building. The study of permeability and wayfinding enables us to identify the spatial relationships and the degree of privacy of the spaces within the building. It is expected that various target users will experience different levels of wayfinding and permeability based on the function of the spaces.

2 Literature Review

2.1 Space Syntax

Space syntax theory developed by Bill Hillier and Julienne Hanon circumscribes a set of techniques and theories as a tool to analyze spatial configurations. The spaces include buildings, landscapes, cities, and interior spaces (Hillier & Hanson, 1984). By using the analytical comparative approach, the theory of space syntax enables people to distinguish the level of privacy based on the configurations. (Mustafa, F.A. et al, 2010) Besides, the tool can identify how the spaces are arranged and experienced by the people which can carry cultural and social significance. (Dursun, 2007) (Abrams, J. B. , 2010) The spatial configuration and the layout will influence the way how an individual utilized them. (Hassan, 2004)

Space syntax has a significant focus on the networking between spaces. The practice of studying the connectivity between the spaces requires a graphical representation of the spatial organization. It can be examined and analyzed through the graphs of analysis such as justified graphs and syntactic steps. (Klarqvist, 1993) The level of permeability will be obtained. The results show the peoples' opinion in satisfaction of the spaces based on the properties of that certain space. (Yavus et al., 2012)

2.2 Background of the Case Study

Studio Bell Music Centre is a recent cultural project designed by Allied Work Architecture (AWA). The components within the building consist of a performance hall, recording facilities, broadcast studios, a live music venue, and a museum, which has a total area of 160,000 square feet. The project includes a 300-seat performance hall and exhibition space with a total of 22,000 square feet. "King Eddy", the masonry building was refurbished and integrated within the newly built Studio Bell's west block. The programs in the center feature a radio station, recording studios, a media center, Artists-in-Residence spaces, and education classrooms.

The building has mixed components that include commercial, museum, and education. The overall spatial design of the building is semi-private due to its limited access to paid visitors. The Studio Bell Music Centre is proudly located in Calgary, Alberta. It is at the site of the legendary blues club in the historic King Edward Hotel. With the live performance, special exhibitions, and interactive educational programs happening in the Studio Bell Music Centre, the connection between the visitors and Canadian musical history can be established. The building is designed as postmodern architecture.



Figure 1: Exterior of Studio Bell, Canada (Photo courtesy of Archdaily)

3 Method

Preliminary research is conducted through quantitative research methods such as journals, articles, and internet research. An overseas site visit is not encouraged to be done by the authors due to the Covid-19 pandemic outbreak. By obtaining the data from online sources, the spatial

arrangements on floor plans can be observed. The analysis of permeability and wayfinding at the studio can be done. Next, the analysis of the case study is done by observing the spatial networking using the measurable scale graph, and examining the spatial hierarchies through the leveling system in the numbering graph (Yusoff et al., 2019). The level of permeability and wayfinding in Studio Bell Music Center is presented in graphical form. The results are then analyzed based on the users' categories.

3.1 Alphanumeric System

The table below shows the alphanumeric system that is used to differentiate different functions of space. Different color with the alphabet symbolizes different building functions. The sequence of the numbering indicated the hierarchy of the spaces.

Table 1: Alphanumeric System based on Building Function

| Function | Alphanumeric | Colour |
|------------------------------|----------------------|--------|
| Building Access | E (E1, E2, E3, etc.) | Yellow |
| Music Exhibitions/Facilities | A (A1, A2, A3, etc) | Orange |
| Amenities | R (R1, R2, R3, etc) | Pink |
| Transportation | T (T1,T2,T3, etc) | Red |
| Services | S (S1, S2, S3, etc) | Grey |
| Administration | C (C1, C2, C3, etc) | Blue |

3.2 Justified Graph

Figure 2 shows the example of a justified graph that will indicate the depth of spaces within the building in a numeric way. The level of permeability and wayfinding is the primary key to developing the space syntax of justified graphs. The justified graph is drawn with the 'root' at the lowest level, branching the 'root' continually in both horizontal and vertical directions. The branching of the nodes will reach its highest number based on the spatial arrangement. A hypothesis says that the higher the numbers, the deeper the spaces. (Lee, 2020)

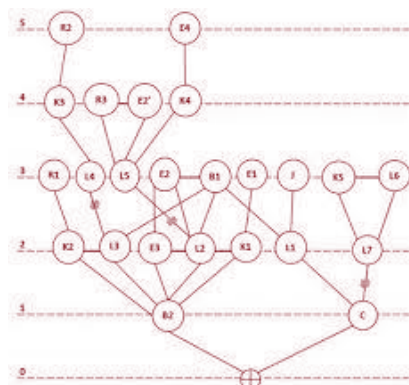


Figure 2: Example of Justified Graph (Lazaridou, 2013)

3.3 Likert Scale

The Likert Scale is used to categorize the type of spaces, ranging from public to extremely private. Each space is rated on the Likert scale shown in the table below. A higher rating of the Likert Scale results in a higher level of permeability.

Table 2: Likert Scale for Space Syntax Analysis

| Rating of Likert Scale | Depth of Permeability | Level of Wayfinding |
|------------------------|-----------------------|---------------------|
| 0-4 | Public | Very Easy |
| 5 | Semi-Public | Easy |
| 6-8 | Semi-Private | Average |
| 9-11 | Private | Difficult |
| 12 | Extremely Private | Very Difficult |

4 Result and Discussion

4.1 Overall Justified Graph in Studio Bell, Canada

The overall justified graph is examined based on the four floorplans, which are the site plan, ground floor plan, first-floor plan, and top floor plan. The analysis shows that the visitors follow the exhibition paths while the staffs mainly occupy the administration spaces.

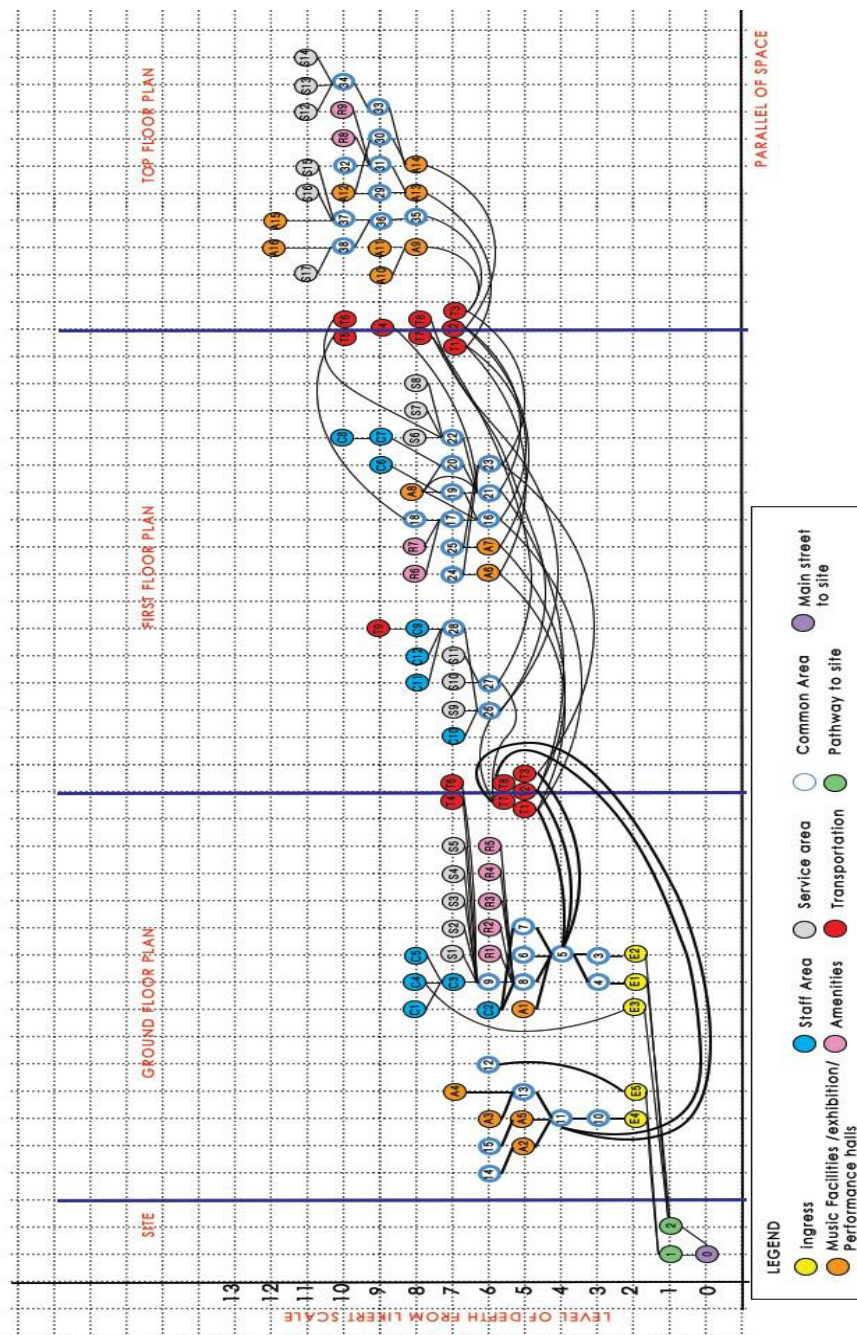


Figure 3: Overall Justified Graph for Studio Bell, Canada

4.2 Analysis of Space Syntax on Site Plan and Ground Floor Plan

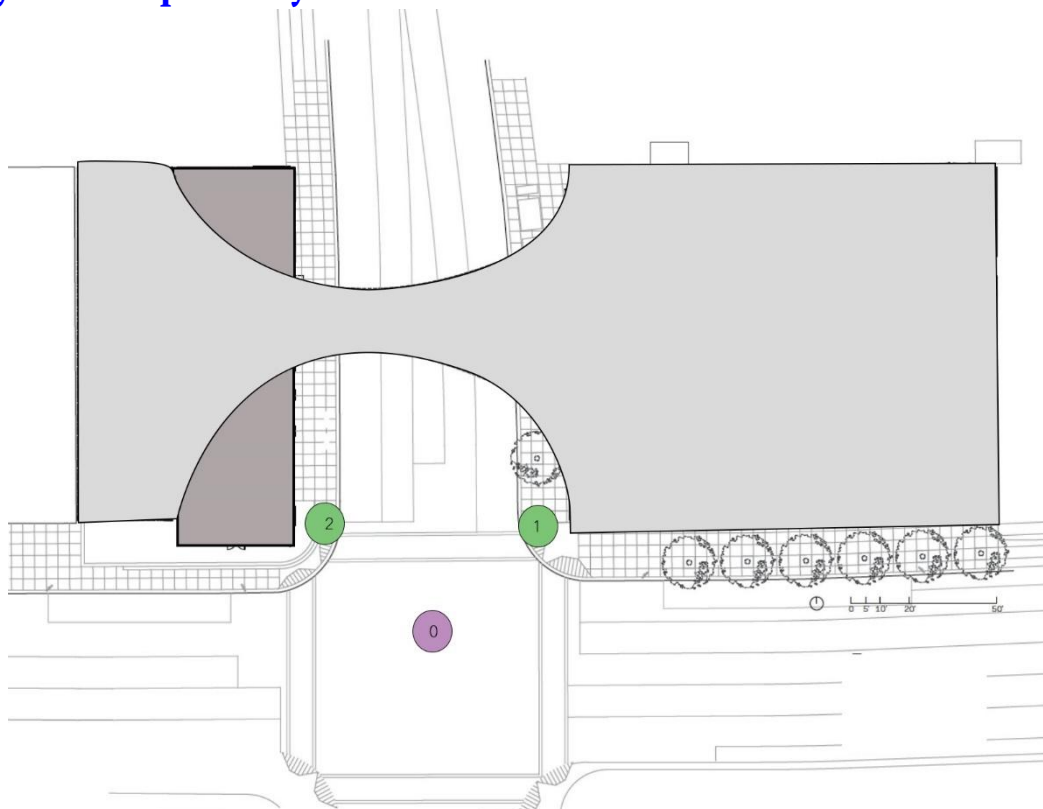


Figure 4: Site Plan with Legend

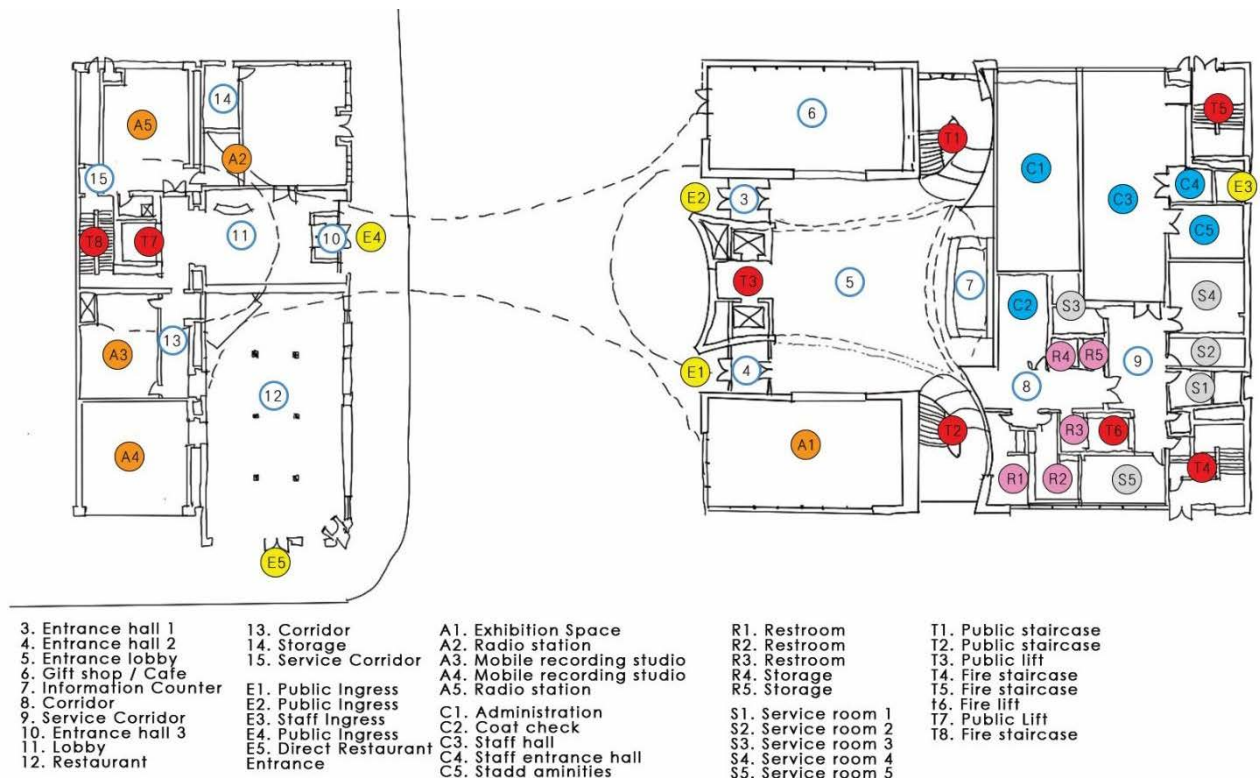


Figure 5: Ground Floor Plan with Legend

In fulfillment with Figures 4 & 5, the building is designed as two towers connected by a bridge on the top floor. The first tower mainly houses exhibitions and galleries for the public while the tower houses recording studios and offices. There are three entrances for the public, namely E1,

E2 & E4. Both entrances (E1 & E2) lead the visitors to the first tower while the entrance (E4) leads the visitors to the second tower, the visitors are welcomed into Studio Bell through a central grand entrance. On the ground floor, there are cafés and exhibitions located on the North and South that can be directly accessed from the lobby. There are two helical staircases (T1&T2) and a lift lobby(T3), playing a role as the primary vertical transportation that takes the visitors to travel up to the main galleries and performance hall. Information counter (C1), coat check (C2) and staff amenities (C3-C5) serve as the administrative management of the building. There is an entrance (E3) enabling the staff to have direct access to the staff amenities. Going into a high-depth level at the ground floor, services lift lobbies (T6) and corridors are provided for the technician to enter the service and mechanical spaces. (S1-S5).

For the second tower, the visitors begin the journey by meeting the grand lobby (11). The visitors have direct access to the radio stations (A2 & A5) and mobile recording studios (A3 & A4) through the corridor. Similar to the first tower, the central lift lobby (T7 & T8) is the vertical transportation that brings the visitors up to the upper floors. There is an entrance enabling pedestrians walking on the street to have direct access (E5) to the restaurant without going through the lobby.

Table 3: Likert Scale on Space Analysis for Ground Floor Plan

| Area (First tower) | Category | Depth Level | Level of Permeability | Level of Wayfinding |
|---------------------|-------------------|-------------|-----------------------|---------------------|
| E1, E2, | Building Entrance | 2 | Public | Very Easy |
| 3 | Common Area | 3 | Public | Very Easy |
| 4 | Common Area | 3 | Public | Very Easy |
| 5 | Common Area | 4 | Public | Very Easy |
| 7 | Common Area | 5 | Semi-Public | Easy |
| 8 | Common Area | 5 | Semi-Public | Easy |
| 6 | Common Area | 5 | Semi-Public | Easy |
| T1 | Transportation | 5 | Semi-Public | Easy |
| T2 | Transportation | 5 | Semi-Public | Easy |
| T3 | Transportation | 5 | Semi-Public | Easy |
| A1 | Music Facilities | 5 | Semi-Public | Easy |
| C2 | Administration | 6 | Semi-Private | Average |
| 9 | Common Area | 6 | Semi-Private | Average |
| R1, R2, R3, R4, R5 | Amenities | 6 | Semi-Private | Average |
| C3 | Administration | 7 | Semi- Private | Average |
| S1, S2, S3, S4, S5 | Services | 7 | Semi- Private | Average |
| T4 | Transportation | 7 | Semi- Private | Average |
| C1 | Administration | 8 | Semi- Private | Average |
| C4 | Administration | 8 | Semi- Private | Average |
| C5 | Administration | 8 | Semi- Private | Average |
| Area (Second tower) | Category | Depth Level | Level of Permeability | Level of Wayfinding |
| E4, E5 | Building Entrance | 2 | Public | Very Easy |
| 10 | Common Area | 3 | Public | Very Easy |
| 12 | Common Area | 3 | Public | Very Easy |
| 11 | Common Area | 4 | Public | Very Easy |
| 13 | Common Area | 5 | Semi-Public | Easy |
| A2 | Music Facilities | 5 | Semi-Public | Easy |
| A5 | Music Facilities | 5 | Semi-Public | Easy |
| T7 | Transportation | 5 | Semi-Public | Easy |
| T8 | Transportation | 5 | Semi-Public | Easy |
| 14 | Common Area | 6 | Semi-Private | Average |
| 15 | Common Area | 6 | Semi-Private | Average |
| A3 | Music Facilities | 6 | Semi-Private | Average |
| A4 | Common Area | 7 | Semi- Private | Average |

Based on the overall permeability graph and the Likert scale table (Table 3), the level of permeability ranges from public to extremely private.

The wayfinding of the spaces varies from easy to difficult. The spaces located on the ground floor are public galleries café and restaurants (6, 12, A1) that are accessible by the public without purchasing the tickets. The main performance halls and exhibition areas are located on the first floor. There is a need to purchase the ticket before u enter. Meanwhile, the administration (C1, C4, C5) and the services (S1-S5) are categorized as private areas where they are non-accessible by the public.

4.3 Analysis of Space Syntax on First Floor Plan

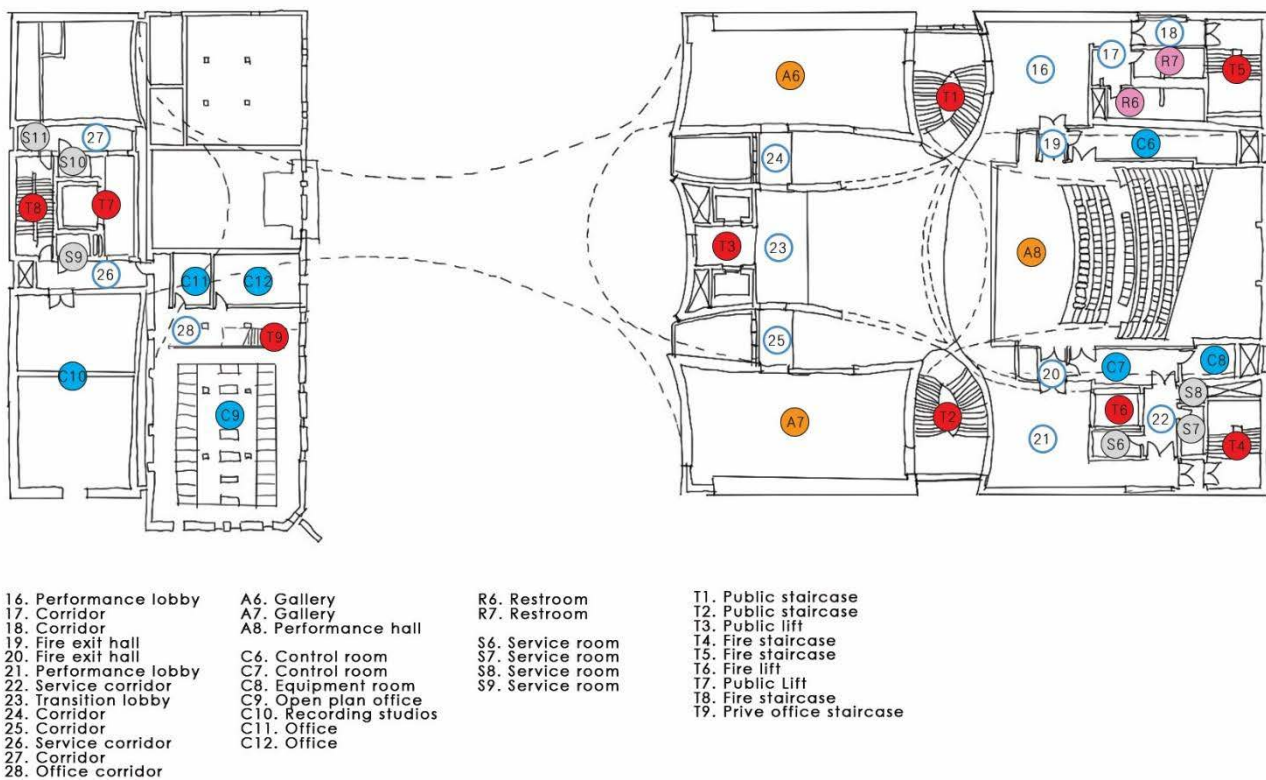


Figure 6: First Floor Plan with Legend

The helical staircases and the public lift bring visitors up to the first floor for the main performance hall(A8) and exhibition spaces (A6, A7). The visitors use both staircases on the North and South to enter the performance waiting for the lobby (16) before entering the main hall (A8). The amenities (R6, R7) and the services (S6-S9) are located at a higher level of depth. The control room (C6, C7) are located surrounding the performance hall. Meanwhile, the first floor of the second tower is the private area as the entire floor is occupied with open-plan offices (C9, C10), there are closed offices and storage (C11, C12) located near the open-plan office. Meanwhile, the services room is connected to the office through the corridor (26, 27). A similar layout repeats on the subsequent floors. For the main tower, the overall justified graph and Likert scale table show that the permeability level for the first floor ranges from semi-public to extremely private with the wayfinding level ranging from easy to very difficult. This shows that the main performance hall and

galleries (A6, A7, A8) go deeper when the floor level goes higher. Services (S6, S7, S8) and administration (C6, C7, C8) are found to be harder in wayfinding as the spaces are categorized as private areas.

As for the second tower, the spaces are accessible by vertical transportation (T7, T8). Administration areas (C9, C10, C11, C12) are dominant on this floor, which is not easily accessible by the public. Hence, the table shows that the spaces have a very high permeability level with very difficult wayfinding. From the office, there is a staircase (T9) that is only accessible by the staff to the upper floors.

Table 4: Likert Scale on Space Analysis for First Floor Plan

| Area (First tower) | Category | Depth Level | Level of Permeability | Level of Wayfinding |
|---------------------|------------------|-------------|-----------------------|---------------------|
| T1 | Transportation | 5 | Semi-Public | Easy |
| T2 | Transportation | 5 | Semi-Public | Easy |
| T3 | Transportation | 5 | Semi-Public | Easy |
| A6 | Music Facilities | 6 | Semi- Private | Average |
| A7 | Music Facilities | 6 | Semi- Private | Average |
| 16 | Common Area | 6 | Semi- Private | Average |
| 21 | Common Area | 6 | Semi- Private | Average |
| 23 | Common Area | 6 | Semi- Private | Average |
| 24 | Common Area | 7 | Semi- Private | Average |
| 25 | Common Area | 7 | Semi- Private | Average |
| 17 | Common Area | 7 | Semi- Private | Average |
| 19 | Common Area | 7 | Semi- Private | Average |
| 20 | Common Area | 7 | Semi- Private | Average |
| 22 | Common Area | 7 | Semi- Private | Average |
| T4 | Transportation | 7 | Semi- Private | Average |
| T5 | Transportation | 7 | Semi- Private | Average |
| R6, R7 | Amenities | 8 | Semi- Private | Average |
| 18 | Common Area | 8 | Semi- Private | Average |
| A8 | Music Facilities | 8 | Semi- Private | Average |
| S6, S7, S8 | Services Area | 8 | Semi- Private | Average |
| C6 | Administration | 9 | Private | Difficult |
| C7 | Administration | 9 | Private | Difficult |
| C8 | Administration | 10 | Private | Difficult |
| Area (Second tower) | Category | Depth Level | Level of Permeability | Level of Wayfinding |
| T7 | Transportation | 5 | Semi-Public | Easy |
| T8 | Transportation | 5 | Semi-Public | Easy |
| 26 | Common Area | 6 | Semi- Private | Average |
| 27 | Common Area | 6 | Semi- Private | Average |
| C10 | Administration | 7 | Semi- Private | Average |
| 28 | Common Area | 7 | Semi- Private | Average |
| S9, S10, S11 | Services Area | 7 | Semi- Private | Average |
| C9 | Administration | 8 | Semi- Private | Average |
| C11 | Administration | 8 | Semi- Private | Average |
| C12 | Administration | 8 | Semi- Private | Average |
| T9 | Transportation | 9 | Private | Difficult |

4.4 Analysis of Space Syntax on Top Floor Plan

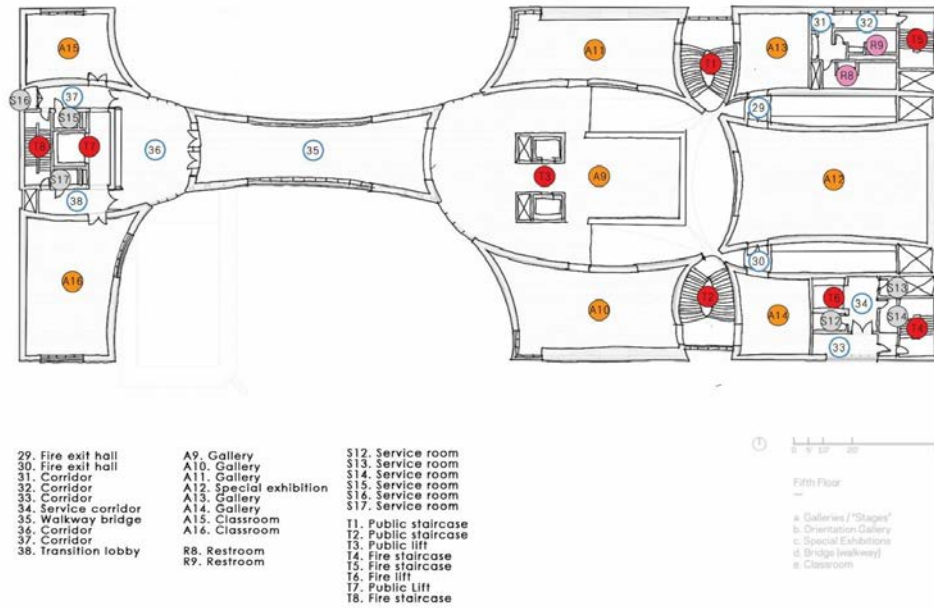


Figure 7: Top Floor Plan with Legend

On the top floor, the two towers are connected by a link bridge (35). It makes up the connection between two parts of the building, allowing a seamless flow of visitors between the two towers. The vertical transport for the public (T1, T2, T3, T7, T8) brings the visitors up to the top floor, reaching the lift lobbies respectively (A9, 36). The galleries (A10, A11) and special exhibition space (A12) are directly accessible from the lift lobby at the main tower while the classrooms (A15, A16) are accessible from the lift lobby at the second tower. Similar to the lower floors, the services (S12-S17) and amenities (R8, R9) is located at a higher level of permeability.

Both graph and table show shows that the top floor is found to be very difficult in the wayfinding. The higher the floor level, the higher the permeability level. The top floor is extremely private and consists of a classroom for music education (A10, A11) and special galleries and exhibitions (A12, A15, A16). The special exhibition areas are located attached to the services corridors and also the bridge linking the second tower. Hence, the exhibition areas can be easily accessible between the spaces on the same floor even though the spaces are considered extremely private zone.

Table 5: Likert Scale on Space Analysis for Top Floor Plan

| Area (Both tower) | Category | Depth Level | Level of Permeability | Level of Wayfinding |
|------------------------------|------------------|-------------|-----------------------|---------------------|
| T1 | Transportation | 7 | Semi- Private | Average |
| T2 | Transportation | 7 | Semi- Private | Average |
| T3 | Transportation | 7 | Semi- Private | Average |
| A9 | Music Facilities | 8 | Semi- Private | Average |
| 35 | Common Area | 8 | Semi- Private | Average |
| A13 | Music Facilities | 8 | Semi- Private | Average |
| A14 | Music Facilities | 8 | Semi- Private | Average |
| T7 | Transportation | 8 | Semi- Private | Average |
| T8 | Transportation | 8 | Semi- Private | Average |
| A10 | Music Facilities | 9 | Private | Difficult |
| A11 | Music Facilities | 9 | Private | Difficult |
| 36 | Common Area | 9 | Private | Difficult |
| 29 | Common Area | 9 | Private | Difficult |
| 31 | Common Area | 9 | Private | Difficult |
| 30 | Common Area | 9 | Private | Difficult |
| 33 | Common Area | 9 | Private | Difficult |
| T4 | Transportation | 9 | Private | Difficult |
| 38 | Common Area | 10 | Private | Difficult |
| 37 | Common Area | 10 | Private | Difficult |
| A12 | Music Facilities | 10 | Private | Difficult |
| 32 | Common Area | 10 | Private | Difficult |
| R8 | Amenities | 10 | Private | Difficult |
| R9 | Amenities | 10 | Private | Difficult |
| 34 | Common Area | 10 | Private | Difficult |
| T5 | Transportation | 10 | Private | Difficult |
| T6 | Transportation | 10 | Private | Difficult |
| S12, S13, S14, S15, S16, S17 | Services Area | 11 | Extremely Private | Very Difficult |
| A15 | Music Facilities | 12 | Extremely Private | Very Difficult |
| A16 | Music Facilities | 12 | Extremely Private | Very Difficult |

5 Discussion

The music center has shown a branching tree-formed graph in its overall circulation. The graph shows that the center is designed as multiple ways route exhibition and performance spaces. Multiple spaces branch out from each node. The multiway route is not as clear and straightforward as the one-way route. It gives multiple choices for the visitors to choose where they wish to go. A signage board to direct the users reaching the desired destination is much needed to be proposed at every node to ease the movement of the visitors. Hence, the characteristic shown by the multiple-way routes is considered complicated for first-time visitors to follow. From the justified graph, as the exhibition goes inward, the permeability of the spaces is covered from public to extremely private zones. However, there is an advantage gained from the route as the visitors have a choice to get a shortcut way to get themselves entering the desired space within the building.

Meanwhile, the service route exhibited a shallow tree-formed graph as most of the service areas are accessible through the same corridor. The services areas are located in similar spaces on every floor. However, the service spaces have a higher depth of permeability to avoid direct access from visitors. Table 6 shows that semi-private spaces occupy 51.9% of the building and have average wayfinding. The semi-private spaces are the spaces that require tickets to enter.

Table 6: Number & percentage of Spaces Based on Level of Permeability and Wayfinding

| Level of Permeability and Wayfinding | Level | Spaces | Number | Percentage (%) |
|---|-------------------|---|--------|----------------|
| Public/Very Easy (0-4) | Site Plan | 0,1,2 | 3 | |
| | Ground Floor Plan | E1, E2, E3, E4, E5, 3, 4, 10, 5, 11 | 10 | |
| Semi-Public/Easy (5) | | | 13 | 12.3 |
| | Ground Floor Plan | A1, A2, A5, 6, 7, 8, 13, | 7 | |
| | First Floor Plan | T1, T2, T3, T7, T8 | 5 | |
| Semi-Private/Average (6-8) | | | 12 | 11.3 |
| | Ground Floor Plan | 14, 15, A3, 12, C2, 9, R1, R2, R3, R4, R5, A4, C3, S1, S2, S3, S4, S5, C1, C4, C5 | 21 | |
| | First Floor Plan | 26, 27, A6, A7, A6, 21, 23, T4, T6, C10, S9, S10, S11, 28, 24, 25, 17, 19, 20, 22, C11, C12, C9, R6, R7, 18, A8, S6, S7, S8 | 30 | |
| | Top Floor Plan | A9, 35, A13, A14 | 4 | |
| Private/ Difficult (9-10) | | | 55 | 51.9 |
| | First Floor Plan | T9, C6, C7 C8 | 4 | |
| | Top Floor Plan | A10, A11, 36, 29, 31, 30, 33, 38, 37, A12, 32, R8, R9, 34 | 14 | |
| Extremely Private/ Very Difficult (11-12) | | | 18 | 17.0 |
| | Top Floor Plan | S12, S13, S14, S15, S16, S17, A15, A16 | 8 | |
| | | | 8 | 7.5 |
| | | | 106 | 100 |

Most of these spaces such as performance halls, galleries, and special exhibition areas are located on the upper floors. The public spaces which occupy 12.3% of the building are mainly located on the ground floor which is very easy to be accessed by visitors. The spaces include the entrances, information counter, café, and restaurants. Several corridors are easily accessible for the public to access the restrooms. The secondary level of permeability is shown by the semi-public spaces, the percentage shown is 11.3%. The private spaces that cover around 17% of the building are mostly made up of the administration areas such as offices and recording studios. The offices and studios are avoided to be accessed by the public to avoid unnecessary interruptions. Lastly, the least percentage, 7.5% of the overall building spaces are the special exhibition areas and classrooms for music education. The extremely private spaces are located on the top floor and have very difficult wayfinding.

Based on the results shown in Table 7, the services and amenities area have more small individual rooms compared to the music facilities as each music facility has a larger open area that opens multiple ways to the other connected exhibition areas. Hence, around 35.8% of the building which is made up of services rooms and facilities has a single connecting space. The double-connecting spaces and triple-connecting spaces have a percentage of 20.8% and 13.2 % respectively. These spaces are mostly comprised of music exhibitions and performing halls which possess the characteristic of the multiple-way route for paid visitors. 14.2% are multiple connecting spaces which are mainly made up of common areas. These spaces branch out and link most of the multi-connecting spaces together. There are approximately 7.5% of the entire building space is the

end room. The end room is mainly made up of the fire staircase and the services rooms. Lastly, 8.5% of the building consists of the staircase and lift which act as vertical transport for the building.

Table 7: Number & percentage of Spaces Based on Connecting Spaces

| Connecting Space | Spaces | Number | Percentage (%) |
|---------------------------|--|--------|----------------|
| End Room | 14, 15, R1, S11, C8, A15, A16, S16 | 8 | 7.5 |
| Single | A3, E4, E5, E1, E2, A1, R4, R5, R3, R2, E3, S4, S3, S1, S3, S2, S9, C10, C11, C12, S10, 23, R6, R7, 17, S8, S7, S6, S17, S15, S17, 32, R8, R9, S1, S13, S14, S12 | 38 | 35.8 |
| Double | 10, 11, A4, 3, 4, 6, 7, C2, S3, C4, 27, 26, A6, 24, A7, 18, C6, 22, 35, A11, 29, 30, A10 | 22 | 20.8 |
| Triple | A5, A2, 12, C1, C3, 23, 19, 20, 36, A13, 31, A14, 33, A12 | 14 | 13.2 |
| Multiple | 13, 5, 8, 9, C9, 28, 29, 16, A8, C7, 21, 38, 37, A9, 34 | 15 | 14.2 |
| Staircases & Lift lobbies | T1, T2, T3, T4, T5, T6, T7, T8, T9 | 9 | 8.5 |
| | | 106 | 100 |

6 Conclusion

National Music center of Canada – Studio Bell is designed with a multiple-way route for the paid visitors to experience the internal spaces of the building. The design creates multiple choices for the visitors to choose from. Following the routes provided, both services and administration areas are located at a higher depth of permeability. The design is considered satisfactory as the public spaces and services are zoned. However, the design can be enhanced by appropriately allocating the directional signage to the users to have a clear vision of where they are heading. From the overall justified graph, the overall space syntax performance in Studio Bell is mostly semi-private and a have average wayfinding, it takes up approximately 51.9% of the entire building space. The semi-private spaces include a series of exhibitions, galleries, and performance halls which require entrance fees. Besides, the office is also included in a semi-private space and is not easily accessible by the public to give privacy to the personnel, protecting the space from unnecessary interruptions. In terms of space connection, the music facilities and exhibitions are mostly double and triple-connecting spaces where the series of exhibitions is connected. Meanwhile, the administration and service are mainly single connecting spaces and end rooms.

The study emphasizes the spatial relationship within the entire building based on the space syntax analysis. Studio bell has a satisfactory circulation which is designed for both public and private personnel. From the justified graph shown, the building is unique as it is separated into two towers with a busy street in between. The building is visually accessible by road users. Studio Bell has 4 entrances that enable visitors to direct access to the space based on their visiting purposes.

Due to the Covid-19 pandemic, the research is carried out online due to the movement control order implemented by the government. Perhaps a site visit can be conducted in the future to have a depth study.

7 Availability of Data and Material

Data can be made available by contacting the corresponding author.

8 Acknowledgement

The authors appreciate the financial support from the Double Twin Foundation, under contract number FG2021-987.

9 References

- Abrams, J. B. (2010). *Wayfinding in Architecture*. Florida: University of South Florida.
- Beck M. P. and Turkienicz B. (2009). Visibility and Permeability Complementary Syntactical Attributes of Wayfinding. 7th International Space Syntax Symposium. Stockholm.
- Dursun, P. (2007). *Space Syntax in Architectural Design*. 6th International Space Syntax Symposium
- Hillier, B., & Hanson, J. (1984). *The Social Logic of Space*. Cambridge University Press.
- Hassan, A. S. (2004). *Issues in sustainable development of architecture in Malaysia*. University Sains Malaysia.
- Klarqvist, B. (1993). *A Space Syntax Glossary*. 11.
- Lazaridou, A. (2013). Visibility and permeability relations in three-dimensional cultural environments: The Ashmolean Museum as a case study.
- Lee, J. H. (2020). Reinterpreting Sustainable Architecture: What Does It Mean Syntactically? MDPI.
- Li, J.M, Susanne, K., Niklaas, D., Stephan, V., Louis, L. (2019) Vysehrad Performing Art Center: architectural translation of indigenous images in Prague. *Vysehrad Performing Art Center*. 2 July 2019
- Lim, H.Y., Hassan, A.S., Arab, Y., Angood, R.S.A.B. (2019) Levels of Permeability and Wayfinding in Autism Institution. *International Transaction Journal of Engineering, Management, & Applied Sciences & Technologies*. 10(14).
- Lynch, K. (1960). *The Image of the City*. MA: MIT Press Cambridge
- Mustafa, F.A, Hassan, A.S. & Baper, S.Y. (2010) Using Space Syntax Analysis in Detecting Privacy: A Comparative Study of Traditional and Modern House Layouts in Erbil City, Iraq. *Asian Social Science*. 6(8), 157.
- National Music Of Canada (n.d). Retrieved from Allied Works Architecture : <https://alliedworks.com/>
- National Music Of Canada (n.d). Retrieved from Architizer : <https://architizer.com/>
- Nes, A. v. (2014). *Space Syntax in Theory and Practice*.
- Studio Bell (n.d). Retrieved from Studio Bell. National Music Centre : <https://www.studiobell.ca/>
- Studio Bell (n.d). Retrieved from Eve Experience : <https://www.evexperience.com/>
- Wolf, J.H., Feitosa, F., Marques, L.L., (2021) Efficiency and Equity in the Spatial Planning of Primary Schools. *International Journal of E-Planning Research*, 10(1), 21-38
- Yavuz, Aysel; Nilgun Kuloglu. (2012). A Research on Permeability Concept at an Urban Pedestrian Shopping Street: A Case of Trabzon Kunduracilar Street. Trabzon.
- Yusoff, N., Hassan, A.S., Ali, A. & Witchayangkoon, B. (2019). *Public Space and Private Space*

Yusoff et al. (2019). Public Space And Private Space Configuration In Integrated Multifunctional Reservoir: Case Of Marina Barrage, Singapore.



Ang Pheik Yee is a postgraduate student in Master of Architecture at the School of Housing, Building and Planning, Universiti Sains Malaysia (USM), Penang, Malaysia. She is a graduate with a Bachelor of Science Architecture degree from Universiti Kebangsaan Malaysia. Her research interests focus on both Architectural and Landscape Design for Sustainable Development



Professor Dr Ahmad Sanusi Hassan is a lecturer in the Architecture Programme at the School of Housing, Building and Planning, Universiti Sains Malaysia (USM), Penang, Malaysia. He obtained his Doctor of Philosophy (PhD) degree from the University of Nottingham, United Kingdom. His research focuses on sustainable architecture and urban design development for Southeast Asia, the history and theory of architecture, daylighting and thermal comfort.



Dr Yasser Arab is an assistant professor at the Department of Architectural Engineering, Dhofar University, Salalah, Sultanate of Oman. He is a researcher in Architecture. He obtained his Bachelor of Architecture from Ittihad Private University, Aleppo, Syria. He obtained a PhD. in Sustainable Architecture from Universiti Sains Malaysia (USM), Penang, Malaysia, his research focused on the Environment Performance of Residential High-Rise Buildings' Façade in Malaysia. He is a Registered Architect in the Syrian Engineers Union.



Dr. Fatemeh Khozaei is an Assistant Professor Department of Architectural Engineering, at Dhofar University, Salalah, Sultanate of Oman. She received her Ph.D. In architecture from Universiti Sains Malaysia. She has published over 50 papers in international journals and conferences. Her area of interest lies mainly in the area of energy and the impact of the environment on human being. She revived the best researcher award in the Islamic Azad University of Kerman and the whole province in 2015. She is a scientific member of two ISI-indexed journals of Baghe Nazar and Transaction Journal of Engineering, Management & Applied.



Dr. Boonsap Witchayangkoon is an Associate Professor of the Department of Civil Engineering at Thammasat University. He received his B.Eng. from King Mongkut's University of Technology Thonburi with Honors. He continued his PhD study at the University of Maine, USA, where he obtained his PhD in Spatial Information Science & Engineering. His current interests involve Applications of Emerging Technologies to Engineering.

Note: Original version of this article was accepted and presented at the 6th International Conference-Workshop on Sustainable Architecture and Urban Design (ICWSAUD) organized by Department of Architectural Engineering, Dhofar University, Salalah, Sultanate of Oman, during 23-24 November 2022.