



# Aal Configuration of a Museum Typology With a Case of the Audain Art Museum Canada

Khaw Su Chee<sup>1</sup>, Muhammad Hafeez Abdul Nasir<sup>1</sup>, Ahmad Sanusi Hassan<sup>1</sup>, Yasser Arab<sup>\*2</sup>,  
Boonsap Witchayangkoon<sup>3</sup>

<sup>1</sup>School of Housing, Building and Planning, Universiti Sains Malaysia, Penang, MALAYSIA.

<sup>2</sup>Department of Architectural Engineering, College of Engineering, Dhofar University, Salalah, OMAN.

<sup>3</sup>Department of Civil Engineering, Thammasat School of Engineering, Thammasat University, THAILAND

\*Corresponding Author (Tel: +968 9987 2907, Email: yarab@du.edu.om).

**Paper ID: 14A1N**

**Volume 14 Issue 1**

Received 09 September  
2022

Received in revised form 09  
December 2022

Accepted 16 December  
2022

Available online 23  
December 2022

## Keywords:

Permeability;  
Wayfinding; Museum;  
Spatial Arrangement;  
Privacy

## Abstract

An art museum, sometimes known as an art gallery, is a building or place dedicated to the exhibition of art, usually from the museum's collection. It could be public or private property, and it could be open to the public or restricted. The three primary roles of collection, research and public program are inextricably linked in the concept of an art museum, and the museum's management, generally its director, seeks to achieve and maintain a proper balance between them. (Wikipedia, 2021) This paper will focus on the study of space syntax to extract the level of permeability and wayfinding of a museum in Canada named the Audain Art Museum. Audain Art Museum is a 56 thousand-square-foot private museum located in Whistler, British Columbia. The site is located at the Creek floodplain in a rural area. This article will apply the space syntax technique, which will be further developed into a justified graph to gain a better knowledge of the museum's spatial structure. Audain Art Museum illustrates hard accessibility and is designed with semi-private permeability to serve the building purpose. The museum is considered a semi-public and semi-private space because the public is not allowed to enter the building without purchasing a ticket. The spaces allocated for the services are too much for a small museum. The exhibition space of the museum should be extended and reduce the space for services and storage. It is important to maintain the flow of visitors.

**Discipline:** Architecture

©2023 INT TRANS J ENG MANAG SCI TECH.

## Cite This Article:

Khaw, S.C., Hassan, A. S. and Hafeez, M. Arab, Y., and Witchayangkoon, B. (2023). Analysis of Permeability and Wayfinding of University Library: Case Study on SCCC Learning Resource Center. *International Transaction Journal of Engineering, Management, & Applied Sciences & Technologies*, 14(1), 14A1N, 1-15. <http://TUENGR.COM/V14/14A1N.pdf> DOI: 10.14456/ITJEMAST.2023.14

# 1 Introduction

## 1.1 Building Typology

An Art museum which is also known as an art gallery is a space with unaided communication with its visitors. (Art Museum, n.d.) The collections of an art museum are comprised of paintings, sculptures, and decorative arts where the aesthetic value is the major consideration in accepting these collections. The intention and philosophy of the curator can be seen in the display of artworks which is believed to convey a visual message to the viewer through art pieces.

## 1.2 Case Study

The case study chosen for this research is the Audain Art Museum located in Whistler, British Columbia. It is a 56, thousand-square-foot private museum. The reason this building is chosen to be the case study is due to the contemporary design of the museum, the integration of the museum with nature, and the ways how the building is designed simply and directly by projecting a volume of consecutive public spaces and galleries into an existing linear void within the attractive but difficult site in Whistler surrounding forest and the challenge of having the massive snowfall of approximately 15 feet depth throughout the year. (Audain Art Museum / Patkau Architects, 2021) All these characteristics of the contemporary museum give the visitors to feel the different space arrangement compare to other museums.

## 1.3 Research Objective

The goal of this study is to study the design of spaces of a selected art museum in terms of the users' configuration and space functionalities. The objective of this research is to better understand the function of spaces so that the ideal layout as guidelines for the art museum typology can be determined using the space syntax technique. The spaces and graphs are indicated with alphabetical and numerical symbols to provide a

systematic approach to measuring the level of permeability and wayfinding. (Mustafa et al., 2010) According to the floor levels, the graph is used to determine the connectedness and links of each area (Bafna, 2003).

# 2 Literature Review

## 2.1 Space Syntax

### 2.1.1 Permeability and Wayfinding

The space syntax is a method to determine the connections between human activities and the spaces inside a habited space (Bafna, 2003). The basic goal of space syntax is to investigate the spatial transition of human movement from one location to another. During the evaluation, transition spaces and connectedness are frequently encountered; space syntax analysis is frequently represented by the level of permeability found in building design (Mustafa et al., 2010). The building's design, on the other hand, is based on the designer's planned purpose and functions. The level of Wayfinding can be derived using space syntax analysis, which is a study of accessibility

within graphs (Yusoff, 2019). In his book "The Image of the City," Kevin A. Lynch (1960) described wayfinding as the "consistent use of an organization of definite sensory indications from the external world." To put it another way, space syntax enables people to study the interaction between human activities and spaces in a variety of ways based on the structure of the inhabited area (Penn, 2003). To organize themselves, habitual societies frequently employ space as the keyword and essential information. Permeability and wayfinding are variables in the space syntax that can be used to express or measure patterns of behavior within space (Hillier & Hanson, 1984).

### **2.1.2 Background of the Case Study**

The Audain Art Museum contains the administration and back-of-house support operations and is elevated a whole story above the ground with a sharply slanted roof. Starting from the village stroll, the pedestrian spine of the Whistler Village, to Blackcomb Way, traveling to and past the Museum, and then across the site to Fitzsimmons Creek park, the building design, and placement work together to form a public walkway link. A sky-lit museum entry porch can be reached via a bridge that rises through the forest from Blackcomb Way. From there onwards, guests can either continue their journey across the site by descending to the forest floor and the central meadow, or access the museum lobby and event area. Inside, visitors can stroll through a glazed walkway that overlooks the meadow below to obtain access to the permanent collection galleries, followed by the galleries that house occasional displays. (Audain Art Museum / Patkau Architects, 2021) The permeability of the space is the privacy and security to protect the art pieces.

### **2.1.3 Building Typology, Location, and Building Style**

It is a private art museum that served the public. Visitors need to purchase entry tickets before entering the museum. The museum aims to exhibit selected art pieces from the owner of the art gallery to the visitors. The museum is divided into public space which is spaces before entering the exhibition area, semi-public places which are the tea room and broad room, and there are also some private places such as office and caretaker suite. Furthermore, the security of an art museum must be good to protect the high-value items and ensure the privacy of the museum. (Art Museum, n.d.) The site in the Whistler is located within the Creek floodplain in a rural area, surrounded by evergreen forest foliage and having massive snowfall weather of 15 feet yearly accumulation depth. (Audain Art Museum / Patkau Architects, 2021). The building style of the museum is Minimalist and modern. The style of the building can be identified by the simple and direct design of a linear void volume of sequential public space and gallery within the surrounding forest. The Audain Art Museum's shape and character are purposefully constrained to give a serene, simple backdrop to the art inside and the surrounding natural setting. The basic exterior is encased in a dark metal envelope that blends into the shadows of the surrounding woodland. The black metal is topped by an attractive light wood casing where this envelope is opened, to enable access in the entry porch or a view from the glazed walkway to the galleries. This warm bright materiality is continued in the

interior public spaces that are visible from the outside. (Audain Art Museum / Patkau Architects, 2021)

## 3 Method

### 3.1 Permeability and Wayfinding Analysis

The Audain Art Museum is chosen as the case study for this paper. A preliminary analysis of the space was undertaken to utilize the Space Syntax theory for this study. A base CAD design is created by utilizing AutoCAD to redraw the layout plans for the case study to undergo analysis and then post-editing with the Adobe Photoshop software.

By examining the layout plans of the case study, space syntax analysis is used in this work to document the level of permeability and wayfinding. Following that, the important facts and information were acquired using a qualitative analysis method. The permeability and wayfinding were studied using the Likert scale and graphs with a numbering system. The ideal strategy for completing this wayfinding challenge is to investigate spatial hierarchies by leveling in a quantifiable scale graph (Brandon. J, 2010). In the measurable scale graph, the leveling system is depicted.

The level of permeability and wayfinding is investigated by drawing justified graphs with two axes, X and y, to visualize the depth level of the spaces (Figure 1). The first step, according to Hillier, Hanson, and Peponis (1984), is to decide what information should be gathered from the market museum. The spatial description will next expose the adaptive features that allow for social item justifications. The identification and depiction of spatial elements, the categorization of spatial interactions, and the modeling of commons will all be considered in these descriptions.

The spaces will be segmented according to the zoning of the spaces to determine the level of wayfinding and permeability between them. For example, there is a degree of permeability from public to semi-public, and semi-private to private space, particularly in the art museum. The depth of the spaces will be determined by comparing the spaces according to the permeability levels (as shown in table 1) and the depth of the spaces will be determined by utilizing the justified graphs (as shown in Figure 3).



**Figure 1:** An elementary representation for space syntax analysis- "a" represents minimum depth ( symmetric system), "b" a linear sequence of maximum depth ( asymmetrical system)


Ten colors are used to denote typologies or groups of spaces in all of the tables under the case study section. For example, the pink and red colors denote the building transit system, while the green denotes commercial spaces and the dark blue denotes the entrance. Light blue denotes toilets and brown color denotes caretaker suites. Purple denotes the office, grey denotes the car

park and orange denotes the services and storage within the buildings. The rest of the numbering which is in black denotes ordinary spaces which accommodate mostly the public. It is critical to identify the different zones of the spaces not only with a number or alphabetical symbol but also with a color code. The objective for this is to achieve a better understanding of how spaces are linked depending on their functionalities.




**Figure 2: Site Plan Redrawn from Original Plan**

The Audain Art Museum has three entrances in total to reach the exhibition area. EN1 is the main entrance straight from the drop-off where visitors are led to the lobby (4) on the 1st floor through terraced seating/stairs. The lower part of the terraced seating is used as temporary storage (SE1) to store art pieces. There is two verticle access which were marked in light green colorations at both ends of the building. S1, L1, and S2 can be found as the verticle access points at the end of the building. The services lift lobby (L2) and services (SE3, SE4, SE5, SE6) are located in the middle of the building with a service entry (SE2) leading to the services lobby. This part is considered semi-private which is used for the services of the building. The car park is located just beside the museum to ease the visitors' access to the museum (Figure 2).

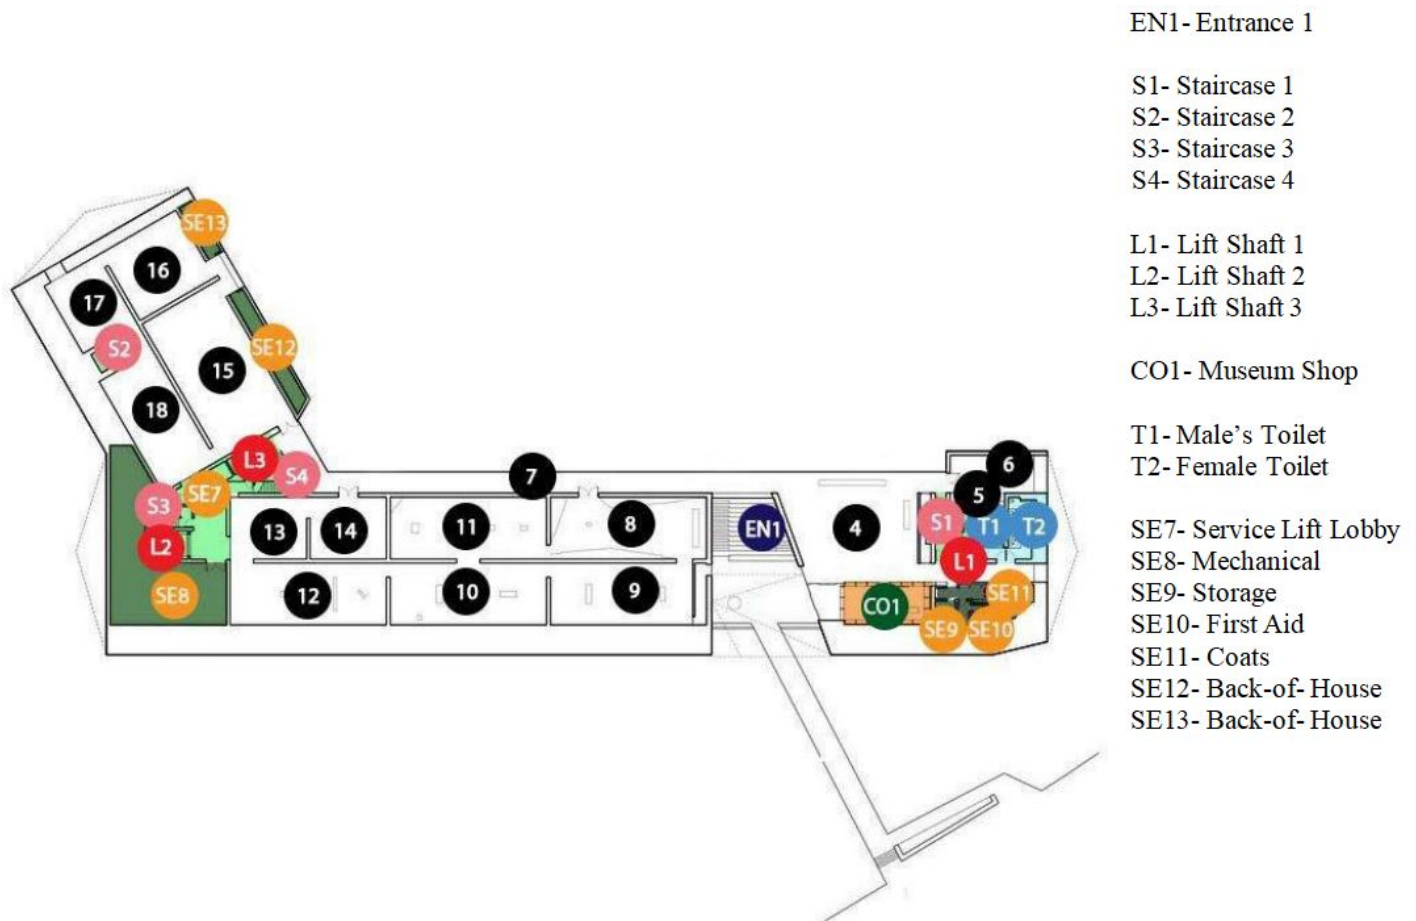


**Figure 3:** 1st Floor Plan Redrawn from source: (Audain Art Museum / Patkau Architects, 2021)

Going up from the ground floor from EN1, visitors will reach the lobby (4) first to proceed with registration. Besides the lobby, there is a souvenir shop (CO1) for visitors to purchase gifts. The Catering (5) and education spaces (6), as male and female toilets (T1, T2) are located behind the lobby. The Storage, First Aid, and Coats are located behind the museum shop too. Visitors will reach the exhibition corner (8,9,10,11,12,13,14,15,16,17,18) through a long corridor (7) where the back-of-house (SE12,13) is located behind the exhibition corner at the end of the building. The first floor of the museum is considered a semi-public space of the building as it caters the visitors after purchasing their tickets (Figures 3 and 4).

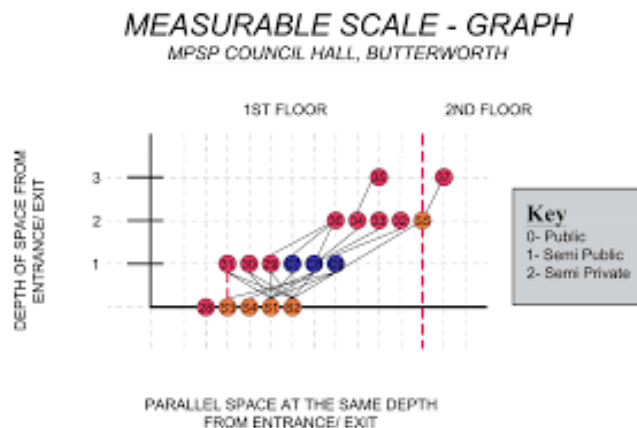

**Figure 4:** Justified Graph showing Ground Floor Plan and First Floor Plan circulation of MPSP Council Hall, Butterworth.

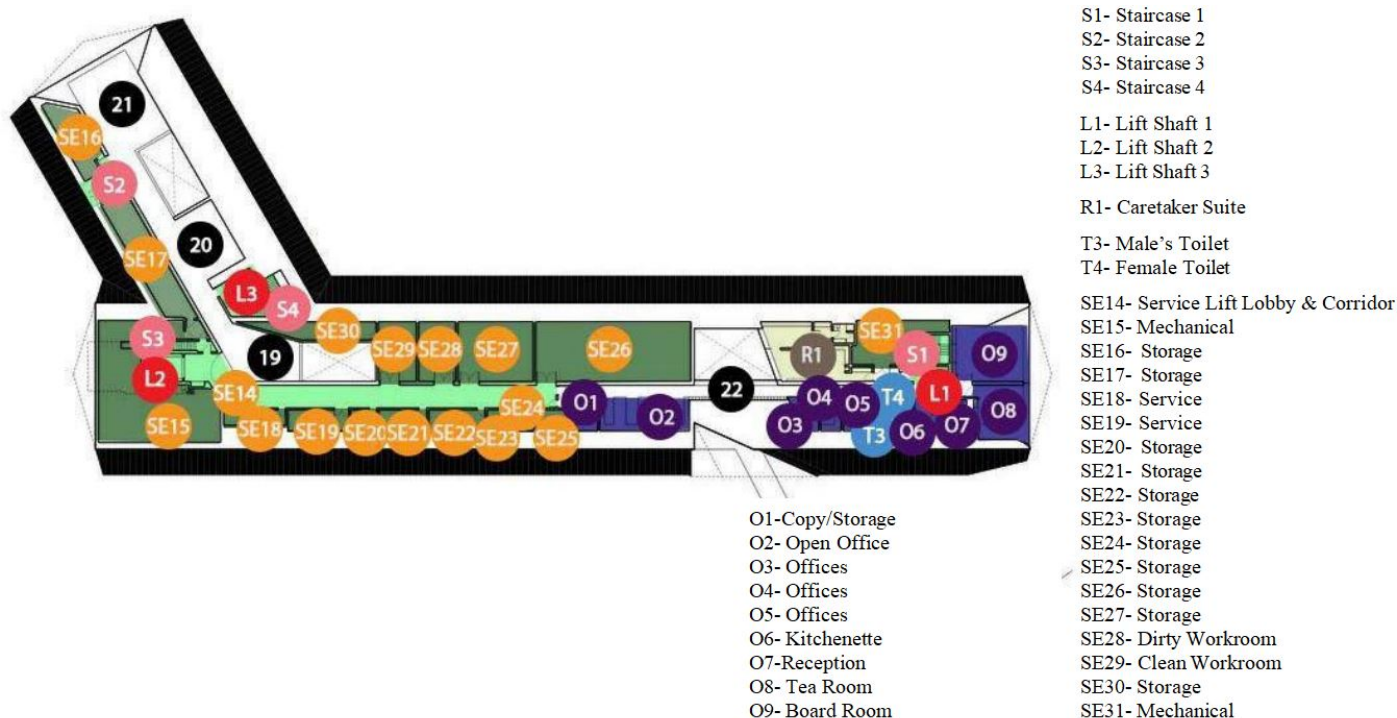

**Figure 5:** 2nd Floor Plan Redrawn from source: (Audain Art Museum / Patkau Architects, 2021)

There are two staircases (S2, S4) and one lift (L3) that lead the visitors to the second floor of the museum. For the 2nd floor only part of the building act as the exhibition space to exhibit art pieces while another two part of the 2nd floor act as the services and storage (SE14-31) and offices (O1-O9) (Figure 5). There are two toilets provided for the office staff on the second floor. Furthermore, a Caretaker Suite (R1) is provided on the top floor.

SITE PLAN

**Table 1:** Scale of the level of permeability

Level of Permeability	Level of Wayfinding	Depth Level of Space
Public	Very Easy	0
Public	Easy	1
Public	Easy	2
Semi-Public	Moderate	3
Semi-Public	Moderate	4
Semi-Private	Hard	5
Semi-Private	Hard	6
Semi-Private	Hard	7
Private	Very Hard	8



**Figure 6:** Scale of Depth for Permeability

## 4 Result

Figure 7 shows the overall result of space syntax. The user categories are public visitors, office staff, and caretaker/owners of the museum. The permeability level depth and the wayfinding rate of the space are determined through visitors, staff, and caretaker usability purposes.

**MEASUREABLE SCALE- GRAPH**  
AUDAIN ART MUSEUM


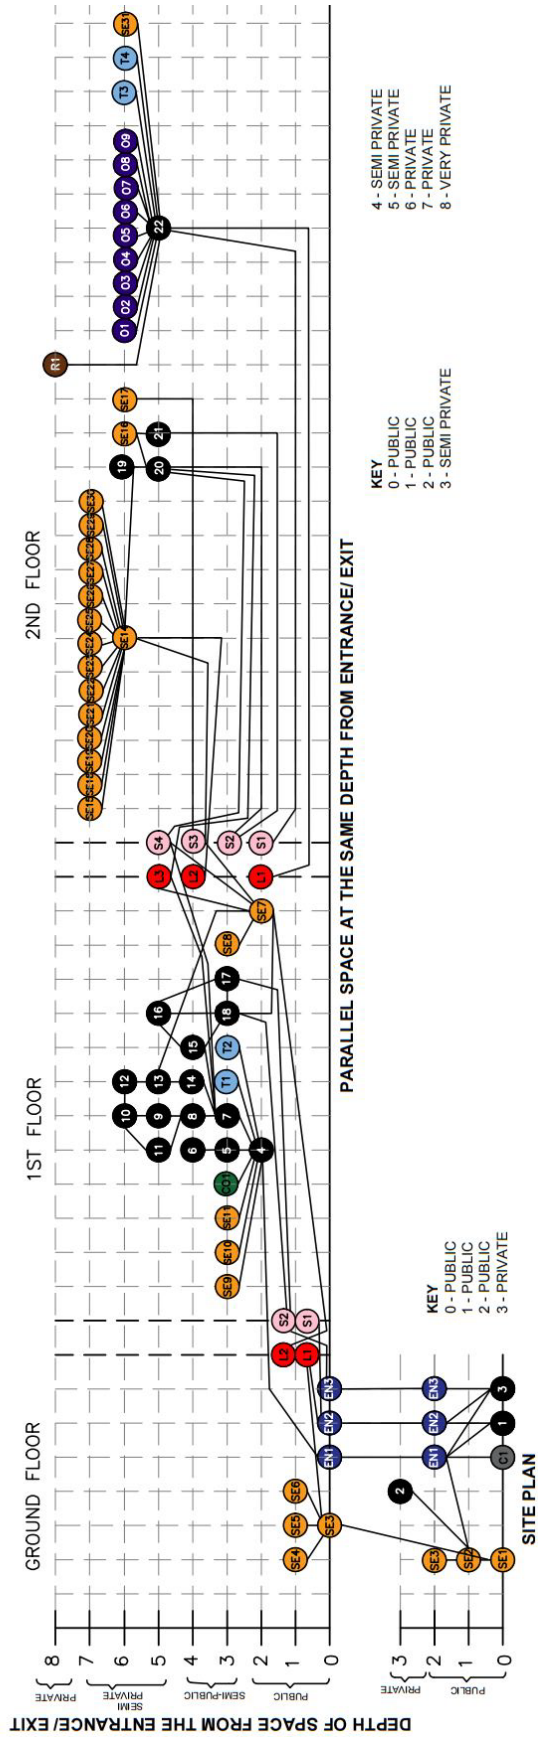



Figure 7: Overall Justified Graph for Audain Art Museum



## 4.1 Level of Permeability and Wayfinding Analysis

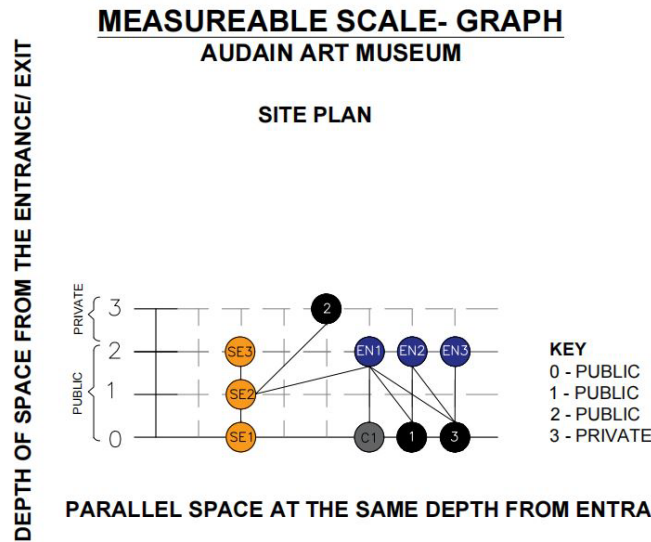

**Figure 8:** Justified Graph of Audain Art Museum for Site Plan

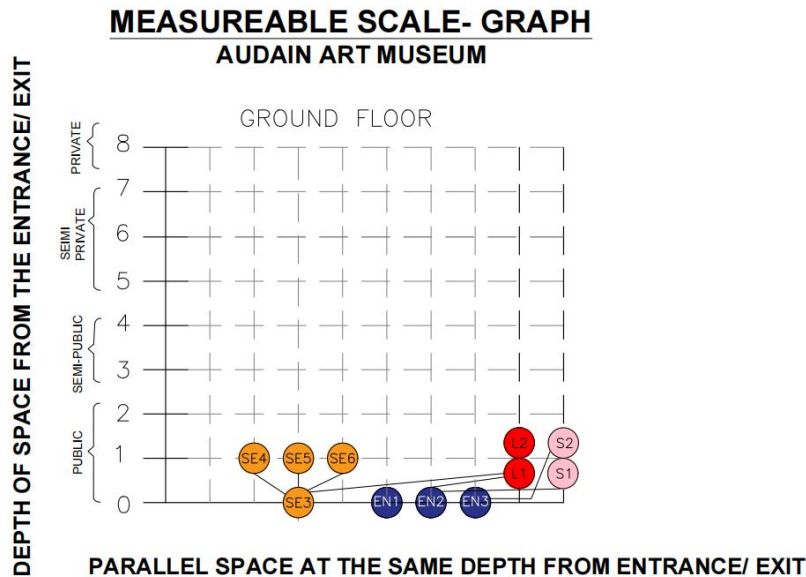

**Figure 9:** Justified Graph of Audain Art Museum for Ground Floor


**Table 2:** Space Syntax Analysis for Ground Floor Plan

Level of Permeability	Level of Wayfinding	Depth Level of Space	Code of Space
Public	Very Easy	0	SE1, C1, 1, 3
Public	Easy	1	SE2
Public	Easy	2	SE3, EN1, EN2, EN3
Private	Moderate	3	2

The justified graph has a two-depth level for the site plan (figure 8), designed for simple accessibility. The ingress and egress area for the visitors is the main drop-off (1) or from the side corridor (3). Visitors can also park their car at (C1) before entering and reach their museum's main entry at (EN1, EN2). (EN3) is an exit entry only for the museum. Services entry is located at (SE3). There is a storeroom (2) located on the ground floor also (Figure 9). The depth level of permeability for SE1, C1, 1, 3, SE2, SE3, EN1, EN2, and EN3 are considered public, while 2 is considered private

for staff or worker access. Table 2 shows the easy level of wayfinding easy is for visitors' accessibility while moderate is for staff or worker accessibility.

**MEASUREABLE SCALE- GRAPH**  
**AUDAIN ART MUSEUM**

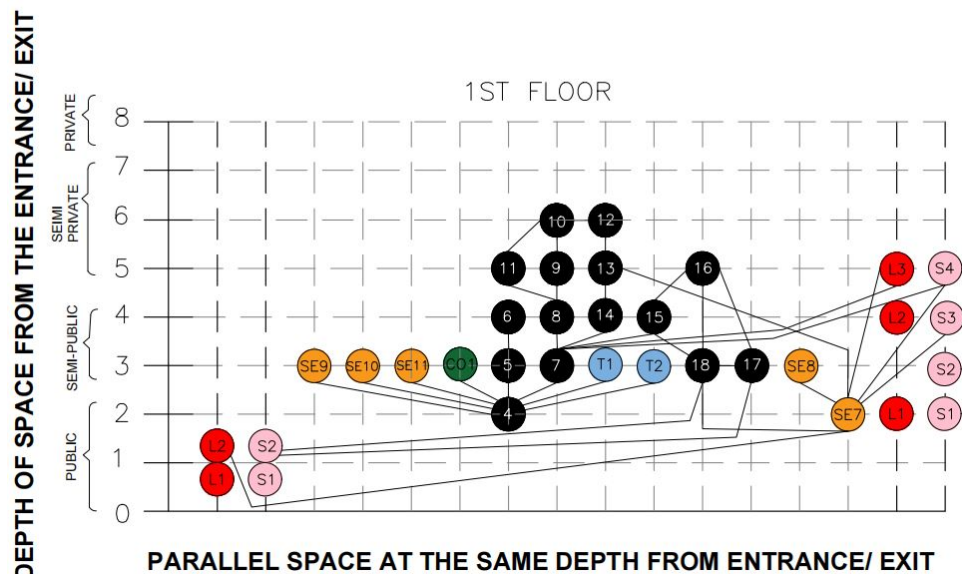

**Figure 10:** Justified Graph of Audain Art Museum for First Floor Plan


**Table 3:** Space Syntax Analysis for First Floor Plan

Level of Permeability	Level of Wayfinding	Depth Level of Space	Code of Space
Public	Easy	2	4
Semi-Public	Moderate	3	SE9, SE10, SE11, CO1, 5, 7, T1,T2,18,17,SE8
Semi-Public	Moderate	4	6, 8, 14, 15
Semi-Private	Hard	5	11, 9,13, 16
Private	Hard	6	10, 12

Table 3 shows 5 levels of depth of permeability for the First Floor Plan, including public to private spaces. The First Floor’s wayfinding levels are mainly easy as it is designed for a more welcoming and serving configuration layout at the receptionist (4) (Figure 10).

There are toilets (T1, T2), a shop (CO1), and services such as storage(SE9), First Aid ( SE10), and coats (SE11) on the first floor. The level of wayfinding on the first floor is considered moderate to hard which is the exhibition area where the permeability is considered semi-private to private.

## MEASURABLE SCALE- GRAPH AUDAIN ART MUSEUM

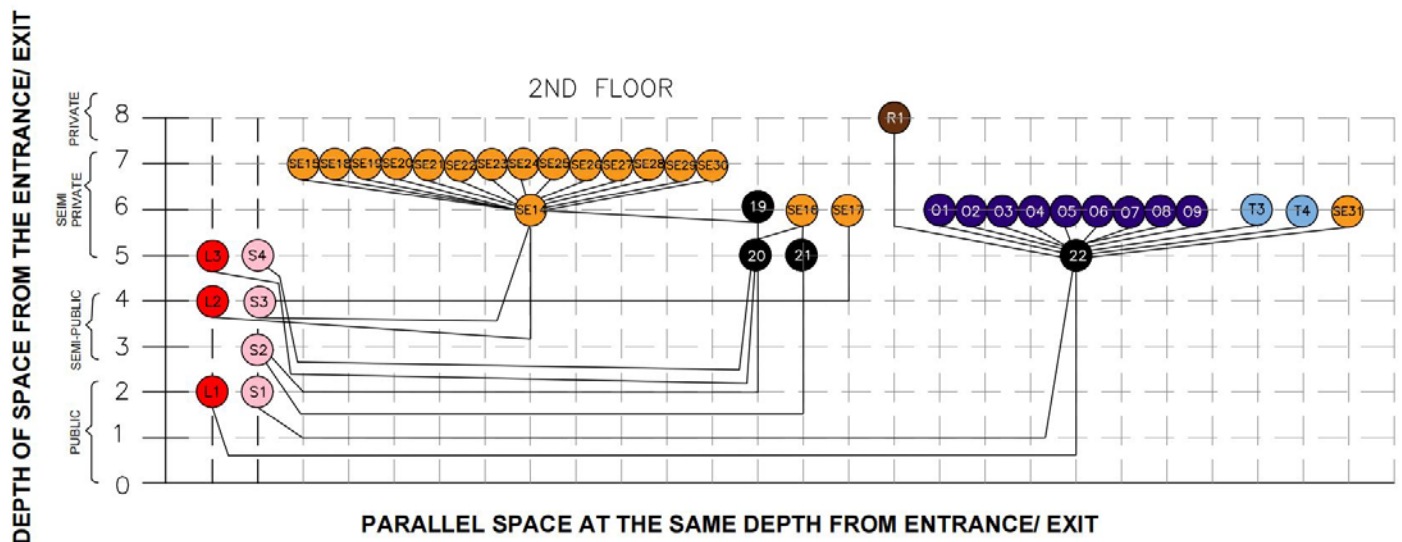

**Figure 11:** Justified Graph of Audain Art Museum for Second Floor Plan

**Table 4:** Space Syntax Analysis for Second Floor Plan

Level of Permeability	Level of Wayfinding	Depth Level of Space	Code of Space
Semi Private	Hard	5	20, 21, 22
Semi Private	Hard	6	SE14, 19, SE16,SE17, O1,O2,O3,O4,O5,O6,O7,O8,O9, T3,T4,SE31
Semi Private	Hard	7	SE15,SE18,SE19,SE20,SE21,SE22, SE23,SE24,SE25,SE26,SE27,SE28,SE 29,SE30
Private	Very Hard	8	R1

There are 4 depth levels on the second floor (Figure 11). 19, 20,21 is still the exhibition area of the museum. 22 is the corridor of the office which is connected to the service corridor of SE14. All the services, mechanical and storage range from SE15-SE31 while the office area range from O1-O9. There is 2 toilet T3, T4 on the 2nd floor which is provided for the office staff. There is one caretaker or room for the museum owner at R1. All the spaces on the second floor are considered semi-private and have a hard level of wayfinding except R1 which has a private level of permeability and a very hard level of wayfinding.

## 5 Discussion

The museum is considered a semi-public and semi-private space because the public is not allowed to enter the building without purchasing a ticket. Most of the exhibition place is a semi-public space where the number of people entering the museum is under control. The administrative part of the museum which is the office located on the uppermost floor of the building is a semi-private place, only staff of the museum are allowed to enter the area. According to the study, art museums allocate quite a big space for their service area too for storage, workroom, mechanical, and services.

Clear patterns of wayfinding behavior across the museum can be seen through the analysis. This is because the circulation presented, influences the users' accessibility and permeability,

which is the study's objective. The Audain Art Museum's wayfinding research revealed the pattern's intricacy. It's a small art gallery with varying levels of privacy since each level serves a different purpose. The majority of the areas are accessible after visitors purchase their tickets, except for some of the places on the second level, which is the museum's administrative area and is only accessible by staff.

When it comes to the site plan, includes large spatial arrangements within the development and the surrounding parts. Architectus applied the method of creating EN1 and EN2 paths that can access the entry from all around the perimeter to make it open. The many entrances are visible on the ground floor level, as can be seen in the Site Plan. According to Table X, the highest permeability is not restricted to 0 for public areas but has a depth of 2 due to the art museum's privacy.

**Table 5: Types, Number and Percentage of Rooms According to Privacy Level**

Depth of Space	Level of Permeability	Types of Rooms	Number of Rooms	Percentage of Rooms (%)
0	Public	SE1, C1, 1, 3	4	6.06
1	Public	SE2	1	1.52
2	Public	SE3, EN1, EN2, EN3, 4	5	7.58
3	Private / Semi Public	2, SE9, SE10, SE11, CO1, 5, 7, T1,T2,18,17,SE8	12	18.18
4	Semi-Public	6, 8, 14, 15	4	6.06
5	Semi-Private	11, 9,13, 16, 20, 21, 22	7	10.61
6	Semi Private	10, 12, SE14, 19, SE16,SE17, O1,O2,O3,O4,O5,O6,O7,O8,O9,T3,T4,SE31	18	27.27
7	Semi Private	SE15, SE18,SE19,SE20,SE21,SE22,SE23, SE24,SE25,SE26,SE27,SE28,SE29, SE30	14	21.21
8	Private	R1	1	1.52
Total			66	100

According to the study, the overall outcome of permeability and wayfinding properties is shaped by visitors and staff's usability circulation. Audain Art Museum illustrates hard accessibility and is designed with Semi-private permeability to serve the building purpose. The level of permeability is based on the result in Table X, the highest levels are semi-private,59.09% and most of the semi-private is on the first floor and the second floor. Next, the second higher-level percentages are semi-public, which is on the first floor. The tertiary level is public, 15.15% with most of the public level on the ground floor. The lowest percentage level is private 1.52% which is located on the ground floor and second floor.

Based on the result shown in Table y, The connecting space through the ground floor consists of 3 entrances surrounding the layout, two lifts and 2-3 staircases linking from the both ending and center of the building. Services, mechanical, and storage are semi-private as there are more in-depth the level of permeability which occupied the major part of 59.09% of the permeability level. A private storeroom with easy wayfinding on the ground floor to keep artwork collected from the loading bay. Most of the exhibition areas have a moderate,24.24% wayfinding

and a hard level of wayfinding in the office area which only allow the entry of museum staff. There is the most difficult wayfinding which has a very hard level, 1.52% is a caretaker suite on the 2nd floor.

**Table 6: Percentage of level Permeability and Wayfinding**

Depth of Space	Floor	Level of Permeability	Percentage of Level Permeability	Level of Wayfinding	Percentage of Level Wayfinding
0	Ground Floor	Public	Public: $10/66 \times 100\% = 15.15\%$	Very Easy	Very Easy: $4/66 \times 100\% = 6.06\%$
1	Ground Floor	Public		Easy	
2	Ground Floor & First Floor	Public		Easy	
3	Ground Floor & First Floor	Private / Semi-Public	Private: $1/66 \times 100\% = 1.52\%$	Moderate	Moderate : $16/66 \times 100\% = 24.24\%$
4	First Floor	Semi-Public	Semi-Public: $15/66 \times 100\% = 22.73\%$	Moderate	
5	First Floor & Second Floor	Semi-Private	Semi-Private : $39/66 \times 100\% = 59.09\%$	Hard	Hard: $39/66 \times 100\% = 59.10\%$
6	First Floor & Second Floor	Semi-Private		Hard	
7	Second Floor	Semi-Private		Hard	
8	Second Floor	Private	Private: $1/66 \times 100\% = 1.52\%$	Very Hard	Very Hard : $1/66 \times 100\% = 1.52\%$

## 6 Conclusion

The museum is considered a semi-public and semi-private space because the public is not allowed to enter the building without purchasing a ticket. Most of the exhibition place is a semi-public space where the number of people entering the museum is under control. The administrative part of the museum which is the office located on the uppermost floor of the building is a semi-private place, only staff of the museum are allowed to enter the area. According to the study, art museums allocate quite a big space for their service area too for storage, workroom, mechanical, and services. Throughout the research, the design of spaces of a selected art museum in terms of the users' configuration and space functionalities is studied. A better understanding of the function of spaces is achieved using the space syntax technique and the research can be used as an ideal layout as guidelines for the normal art museum typology. The overall space syntax performance of the museum is considered a semi-public to semi-private space which only allows people with ticket entry to enter the exhibition. The permeability of an art museum is considered semi-public to semi-private. A normal art museum has moderate to hard wayfinding. This research can be a good guideline for students doing art museum typology. They can take this space configuration as a reference. The spaces allocated for the services are a bit more for a small museum. The exhibition space of the museum should be extended or reduced space allocated for services and storage as it is important to maintain the flow of visitors. The limitation of the study when conducting the research study is that cannot have the actual visit to the site due to pandemics and there is not enough data to be analyzed that get from Archdaily.

## 7 Availability of Data And Material

Data can be made available by contacting the corresponding authors.

## 8 Acknowledgment

The authors would like to express appreciation to the University Sains Malaysia and the School of Housing Building and Planning (HBP) for allowing conducting of this research. Besides, the author would like to extend gratitude to all the parties involved directly or indirectly in this research.

## 9 References

- Art Museum*. (n.d.). Britannica. <https://www.britannica.com/topic/museum-cultural-institution/Art-museums>
- Audain Art Museum / Patkau Architects*. (2021, October 17). ArchDaily. [https://www.archdaily.com/873187/audain-art-museum-patkau-architects?ad\\_medium=gallery](https://www.archdaily.com/873187/audain-art-museum-patkau-architects?ad_medium=gallery)
- Ab Majid, A. H., Hassan, A. S., & Onubi, H. O. (2021). A Study on Space Syntax of NOAA Southwest Fisheries Science Center.
- Abd Rahaman, F. A., Hassan, A. S., Ali, A., & Witchayangkoon, B. (2019). Analysis On Users' Level Of Permeability And Wayfinding In Waste Recovery Facility'S Factory.
- Bafna, S. (2003). Space syntax: A brief introduction to its logic and analytical techniques. *Environment and Behavior*, 35(1), 17-29.
- Batty, M. (2004). A new theory of space syntax.
- Dursun, P. (2007, June). Space syntax in architectural design. In *6th international space syntax symposium* (pp. 01-56).
- Halim, N. F. A., Hassan, A. S., Arab, Y., & Angood, R. S. A. B. (2019). Ocean Conservation And Waste Prevention
- Halim, N. F. A., Hassan, A. S., Arab, Y., & Angood, R. S. A. B. (2019). Ocean conservation and waste prevention center: the study of space syntax in a recycling facility.
- Hillier, B. (2012). Studying cities to learn about minds: Some possible implications of space syntax for spatial cognition. *Environment and Planning B: Planning and Design*, 39(1), 12-32. Centre: The Study Of Space Syntax In Recycling Facility.
- Hillier, B., & Tzortzi, K. (2006). Space syntax: the language of museum space. *A companion to museum studies*, 282-301.
- Jiang, B., & Claramunt, C. (2002). Integration of space syntax into GIS: new perspectives for urban morphology. *Transactions in GIS*, 6(3), 295-309.
- Karimi, K. (2012). A configurational approach to analytical urban design: 'Space syntax methodology. *Urban Design International*, 17(4), 297-318.
- Lynch, K. (1960). *The image of the city*, vol.11. MIT press.
- Munir, M. A. A., Hassan, A. S., Ali, A., & Witchayangkoon, B. (2019). A Study Of Space Syntax Of Spaces For The Urban Poor: Larimer County Food Bank And Capslo Homeless Shelter.


- Mustafa, F., & Hassan, A. (2010). Using Space Syntax Analysis in Determining Level of Functional Efficiency: A Comparative Study of Traditional and Modern House Layouts in Erbil City, Iraq. In *The 2nd International Seminar on Tropical ECO-Settlements: Green Infrastructure: A Strategy to Sustain Urban Settlements* (pp. 131-144).
- Mustafa, F. A., Hassan, A. S., & Baper, S. Y. (2010). Using space syntax analysis in detecting privacy: a comparative study of traditional and modern house layouts in Erbil city, Iraq. *Asian Social Science*, 6(8), 157.
- Mustafa, F. A., & Hassan, A. S. (2013). Mosque layout design: An analytical study of mosque layouts in the early Ottoman period. *Frontiers of Architectural Research*, 2(4), 445-456.
- Penn, A. (2003). Space syntax and spatial cognition: or why the axial line?. *Environment and & A. Churchman (Eds.), Handbook of environmental psychology*. John Wiley. 271-291
- Turner, A. (2007). From axial to road-center lines: a new representation for space syntax and a new model of route choice for transport network analysis. *Environment and Planning B: Planning and Design*, 34(3), 539-555.
- Witchayangkoon, B. *Papers in ITJEMAST 11 (9) 2020*. International Transaction Journal of Engineering, Management, & Applied Sciences & Technologies.
- Yusoff, N., Hassan, A.S., Ali, A. & Witchayangkoon, B. (2019). Public Space and Private Space Configuration in Integrated Multifunctional Reservoir: Case of Marina Barrage, Singapore. *International Transaction Journal of Engineering, Management, & Applied Sciences & Technologies*.10(10), 10A09J: 1-16.
- 



**Khaw Su Chee** is a Master of Architecture candidate in the School of Housing, Building, and Planning, the University of Science, Malaysia (USM). He obtained a Bachelor of Science in Housing, Building and Planning (Architecture) from the University of Science, Malaysia (USM), Penang in 2018. He is an STPM holder in SMJK Perempuan China Pulau Pinang and graduated in 2013.



**Professor Dr. Ahmad Sanusi Hassan** is a Professor in the Architecture Programme at the School of Housing, Building and Planning, Universiti Sains Malaysia (USM), Penang, Malaysia. He obtained a Bachelor's and Master of Architecture degrees from the University of Houston, Texas, USA, and a Doctor of Philosophy (Ph.D.) degree focusing on sustainable architecture and urban design development for Southeast Asia from the University of Nottingham, UK. His researches encompass Urban Analysis and Design, Sustainable Wetlands Architecture, Computer-Aided Design (CAD) and Computer Animation in Architecture.



**Muhammad Hafeez Abdul Nasir** is a Ph.D. student at the Universiti Sains Malaysia under the School of Housing Building and Planning (HBP). Before enrolling in Ph.D., he studied Bachelor of Design Studies at the University of Adelaide for three years since 2010. Later, further continued with a Master of Architecture for another two years at the same university.



**Dr Yasser Arab** is an assistant professor at the Department of Architectural Engineering, Dhofar University, Salala, Sultanate of Oman. He is a researcher in Architecture. He obtained his Bachelor of Architecture from Ittihad Private University, Aleppo, Syria. He obtained a PhD. in Sustainable Architecture from Universiti Sains Malaysia (USM), Penang, Malaysia, his research focused on the Environment Performance of Residential High-Rise Buildings' Façade in Malaysia. He is a Registered Architect in the Syrian Engineers Union.



**Dr. Boonsap Witchayangkoon** is an Associate Professor of the Department of Civil Engineering at Thammasat University. He received his B.Eng. from King Mongkut's University of Technology Thonburi with Honors. He continued his Ph.D. study at the University of Maine, USA, where he obtained his PhD in Spatial Information Science & Engineering. His current interests involve Applications of Emerging Technologies to Engineering.

---